

Paso Recessed Wall Light Installation Instructions




Product Specifications


Model No.	HV3105T-BLK-240V	HV3105T-WHT-240V	HV3105T-BLK-12V	HV3105T-WHT-12V	HV3106T-BLK-240V	HV3106T-WHT-240V	HV3106T-BLK-12V	HV3106T-WHT-12V
Name	Paso				Paso			
Material	Aluminium				Aluminium			
Colour	Black	White	Black	White	Black	White	Black	White
IP Rating	IP20							
Input Voltage	240v AC (Remote Driver)		12v DC - Constant Voltage		240v AC (Remote Driver)		12v DC - Constant Voltage	
Protection Class	2 (No Earth Required)		3 (Low Voltage - No Earth Required)		2 (No Earth Required)		3 (Low Voltage - No Earth Required)	
Lamp Base	Built in LED				Built in LED			
Lamp Wattage	1x 3w				1x 3w			
Colour Temp	Tri Colour - 3000k, 4000k, 5500k		Tri Colour - 3000k, 4000k, 5500k		Tri Colour - 3000k, 4000k, 5500k		Tri Colour - 3000k, 4000k, 5500k	
Lumens	45lm, 55lm, 49lm		45lm, 55lm, 49lm		45lm, 55lm, 49lm		45lm, 55lm, 49lm	
CRI	> 80				> 80			
Wiring	Parallel				Parallel			
Dimmable	Yes				Yes			
Warranty	3 Years Replacement*				3 Years Replacement*			

HV3105T Dimensions

Cut Out = 33 (W) x 82 (H)

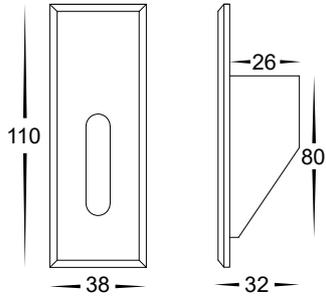


HV3105T Canister Dimensions

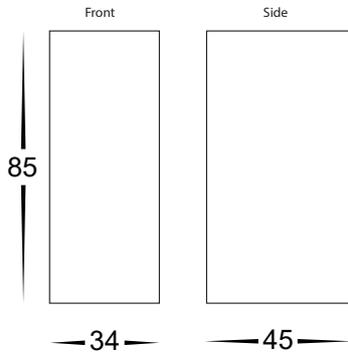


HV3106T Dimensions

Cut Out = 33 (W) x 152 (H)

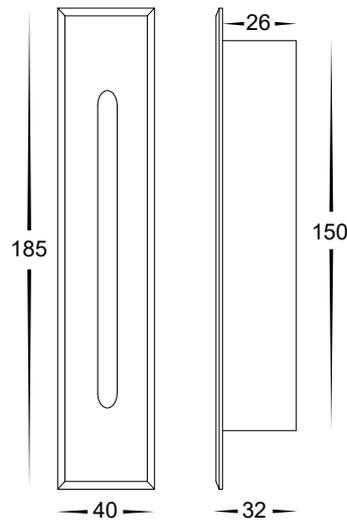


HV3106T Canister Dimensions

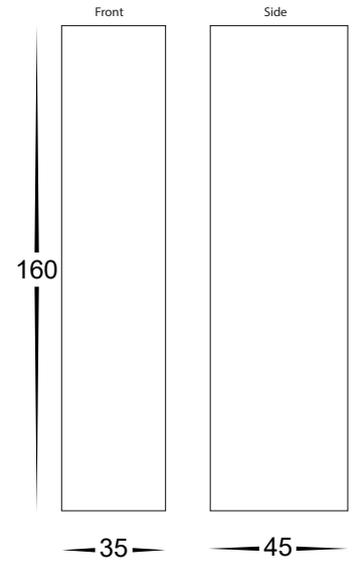

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty.
- These instructions may be updated at any time due to product improvements, Please visit website for most current installation instructions.

Driver Dimensions



Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Make a hole where fitting is to be placed using dimensions provided on line drawings above.
3. If inserting into brick or concrete, insert canister
4. 240v Models - Connect the cable to LED Driver - If more than one fitting installed, wiring must be done in parallel.
5. 12v DC Models - Must be connected to 12v DC Constant Voltage LED Driver.
6. Strip back the cable on both fitting and cable run and twist positive cables together. Then connect neutral cables together making sure to cover connections.
7. Fittings are preset to 3000k, To change colour temperature slide switch located on cable to desired colour temperature.
8. For 240v models insert LED Driver first into hole and then
9. Insert fitting by squeezing clips and gently pushing fitting into cutout.
10. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia
Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



www.havit.com.au

