

# Liptor Oyster Light Installation Instructions




## Product Specifications

Model No.	HV36501T-BLK	HV36501T-WHT	HV36502T-BLK	HV36502T-WHT	HV36503T-BLK	HV36503T-WHT
Name	Liptor					
Material	Aluminium					
Colour	Black	White	Black	White	Black	White
IP Rating	IP54					
Input Voltage	240v AC					
Lamp Base	Built in LED					
Lamp Wattage	1x 10w		1x 20w		1x 30w	
Colour Temp	TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k	
Lumens	440lm, 480lm, 450lm		1130lm, 1360lm, 1310lm		1320lm, 1600lm, 1490lm	
CRI	> 80					
Dimmable	No					
Warranty	3 Years Replacement*					


## Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- When installing copper fittings, gloves must be worn to avoid any oils transferring to fitting.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.


### HV36051 Dimensions




### HV36052 Dimensions

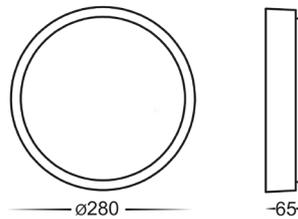


### HV36053 Dimensions

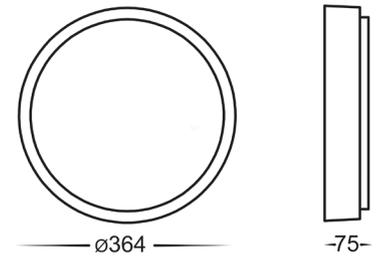


### HV36051 Mounting Base

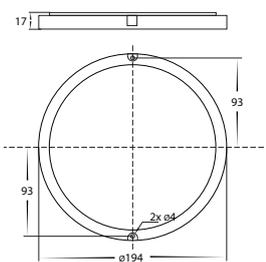

### HV36052 Mounting Base

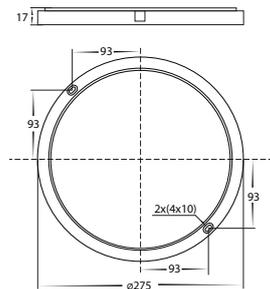

### HV36053 Mounting Base

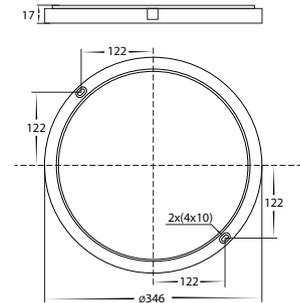

## Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Loosen allen screws from side of fitting and remove outer ring and set aside.
3. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire
4. Attach mounting base in desired location.
5. Loosen screws on front of cover, Remove cover and set aside.
6. Fitting is preset to 3000k, Locate switch on front of LED PCB and slide to desired colour temperature
7. Reattach cover making sure screws are tight to and seals are still in place to avoid water penetration.
8. Reattach outer ring and tighten allen screws on side.
9. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
10. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Steps for Installation for Changing Colour Temperature After Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Loosen allen screws from side of fitting and remove outer ring and set aside.
3. Loosen screws on front of cover, Remove cover and set aside.
4. Locate switch on front of LED PCB and slide to desired colour temperature
5. Reattach cover making sure screws are tight to and seals are still in place to avoid water penetration.
6. Reattach outer ring and tighten allen screws on side.

**Must be installed by a licensed electrician**

### Contact Details:

143 Beauchamp Road  
Matraville NSW 2036  
Australia

Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: sales@havit.com.au  
Web: www.havit.com.au

### Warranty Terms & Conditions\*



### Additional Information

