

200w IP66

Triac Dimmable Weatherproof LED Driver

Material	Aluminium
Colour	Grey
IP Rating	IP66
Input Voltage	240v AC
Output Voltage	Available in either 12v DC or 24v DC
Max Wattage	200w (Recommended Max Wattage = 160w)
Protection Class	1 (Earth Required)
Wiring	Parallel
Dimming Range	10% - 100%
Dimmable	Yes (Triac)
Protections	Short Circuit, Overload, Over Temperature
Warranty	3 Years Replacement

Note: Where the driver is supplied with two outputs, the full load may be connected to either output or divided across both outputs, provided the driver's maximum rated load is not exceeded.

Product Ordering

Part Number	Output Voltage	Barcode
HV9660-12V200W	12v DC Constant Voltage	9350418009692
HV9660-24V200W	24v DC Constant Voltage	9350418009708




Website




Warranty
Terms & Conditions



Dimensions

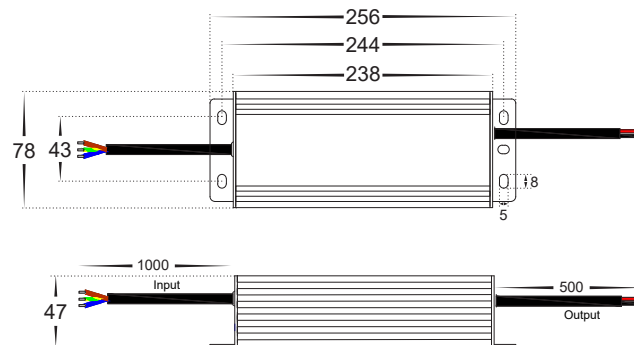

Sample Wiring Diagram

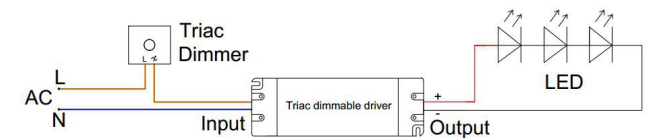

Compatible with



Single Colour LED Strip



Dimmable
Garden
Lights



Dimmable
Deck or Step
Lights



HV9625



240V Dimmer

		HV9660-12V200W	HV9660-24V200W
Output	DC Voltage	12v DC	24v DC
	Voltage Tolerance	± 0.5V	± 0.5V
	Rated Current	16.6A	8.3A
	Rated Power	200W	
	Line Regulation	± 1V	
	No. Output Cables	± 2V	
	Set up time	2000ms, 50ms(at full load) 110V AC / 230V AC	
	Holding time (Typ.)	15ms(at full load) 110V AC / 230V AC	
	Ripple and Noise(max)	120mVp-p	240mVp-p
	Load Regulation	± 2%	
Input	Voltage range Note 2	200~240V AC	
	Frequency Range	47 - 63Hz	
	Power Factor (TYP) @ Full Load	0.95	
	Efficiency(Typ.)@ Full Load	88%	90%
	AC Current (Max)	1.4A / 230V AC	
	Inrush Current (TYP)	Cold start: 50A / 230V AC	
	Leakage Current	<0.5mA / 240V AC	
Protections	Short Circuit	Hiccup mode, Recover automatically after fault condition is removed	
	Overload	<120%	
	Over Temperature	Ta: 100°C ~ 10°C shutdown o/p voltage, re-power on to recover	
Environment	Working Temp.	Ta: -40°C ~ +60°C	
	Working Humidity	20%~90% RH, non-condensing	
	Storage TEMP. Humidity	-40°C ~+80°C, 10%~95% RH	
	TEMP. Coefficient	± 0.03%/°c (0-50°c)	
	Vibration	10~500Hz, 2G 12min./ 1 Cycle, Period for 72min, each along X,Y,Z axes	
Safety & EMC	Safety Standards	Compliance to EN61347-1, EN61347-2-13, AS/NZS61347-1, IP66 waterproof rating.	
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25°C /70%RH	
	EMC Emission	Compliance to AS/NZS CISPR15	
	EMC Immunity	Compliance to AS/NZS CISPR15	

