

HAVIFLEX INSTALLATION INSTRUCTIONS

PRODUCT CODES	COLOUR TEMP.
HV9791-IP67-140-3K	3000K
HV9791-IP67-140-4K	4000K
HV9791-IP67-140-5K	5500K

DIMENSIONS

Please read the following instructions carefully before installation and application and use the product in the correct way.


Instructions on accessories are included in these instructions.

Please properly maintain these instructions after reading and understanding it for convenient reference by all users of the product in the future.

Before installation make sure all components are working including the HAVIFLEX and LED Driver.




Connect these while uninstalled, If there is any product that is not working correctly, Please contact shop where items were purchased from to work out next steps. Do not continue to install the product.

When installed in an outdoor environment, Aluminium Channel cannot be used due to expansion which could possibly cause Haviflex to break, If channel is required, HV9791-PVC-CHANNEL (PVC) must be used to avoid any damage to HAVIFLEX.

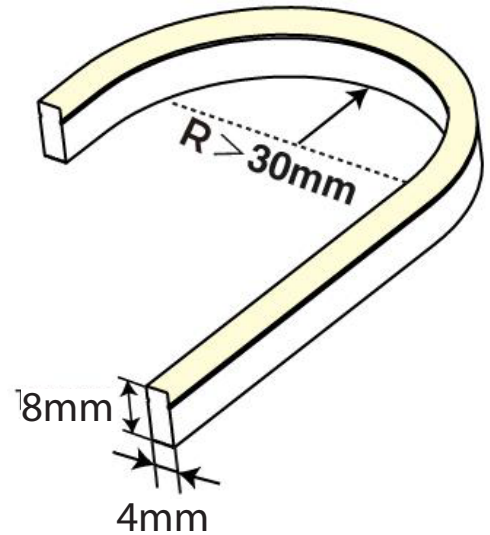


Side Bend Only

Precautions before Installation:

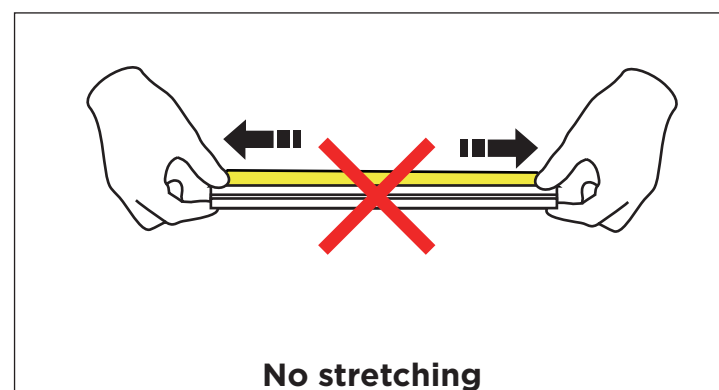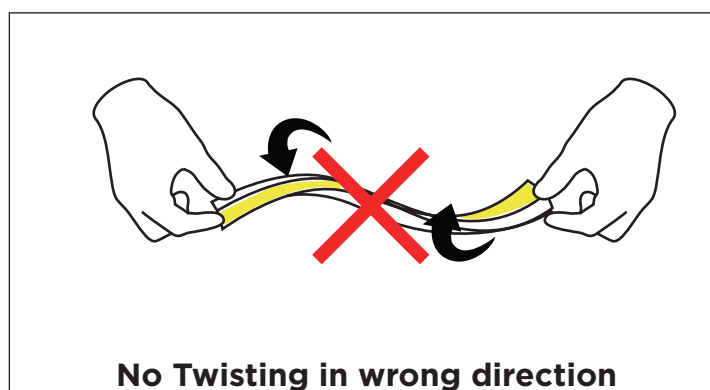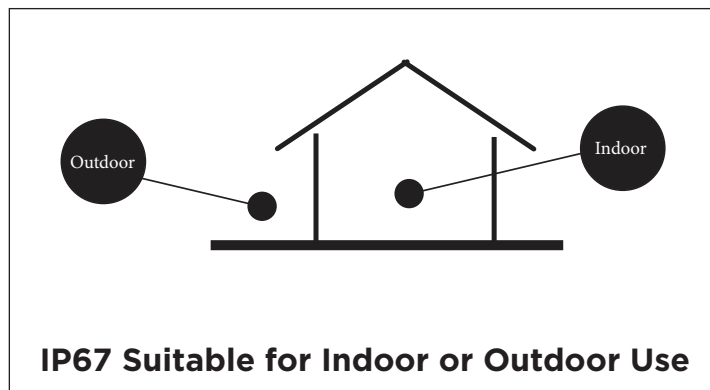

HAVIFLEX INSTALLATION INSTRUCTIONS

Correct Bending Methods:

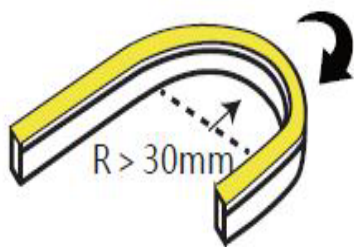


Correct Way



Incorrect Way



Installation Steps:

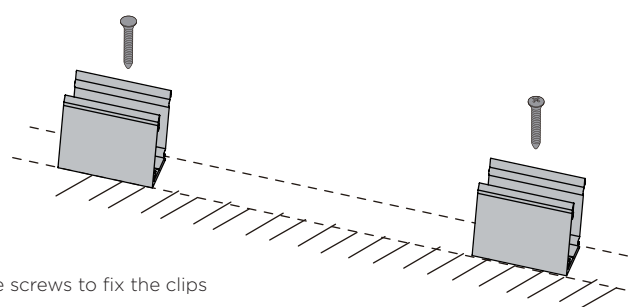



1. Use screws to fix the clips




Minimum 4 clips to be used for every 1m.

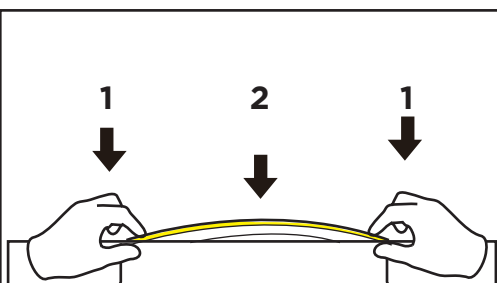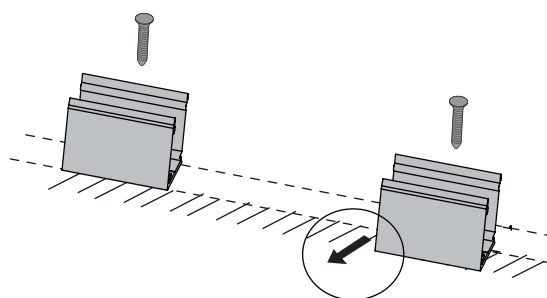



1. When installing the LED strip, install it from both ends at the same time, installation from one direction is prohibited.

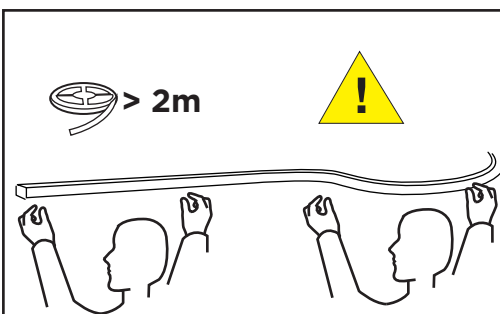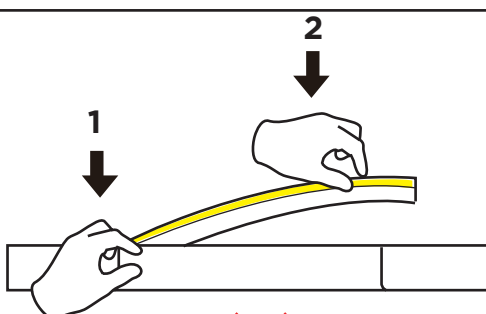

If the length of LED strip is over 2m, it is recommended to install by two persons.

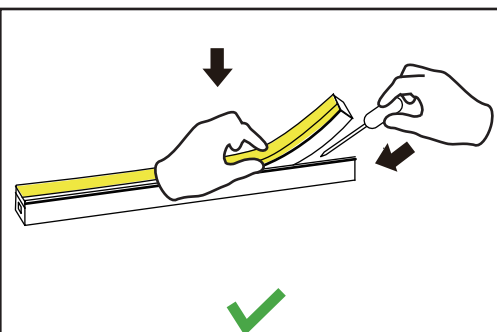

2. To remove disassemble carefully using tool, do not pull the LED strip directly.

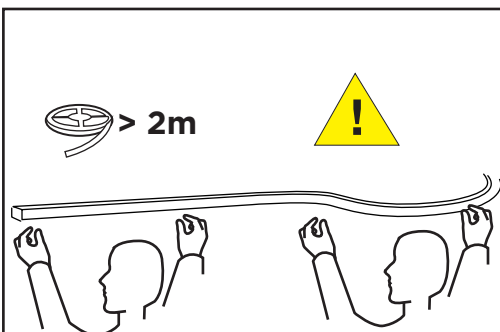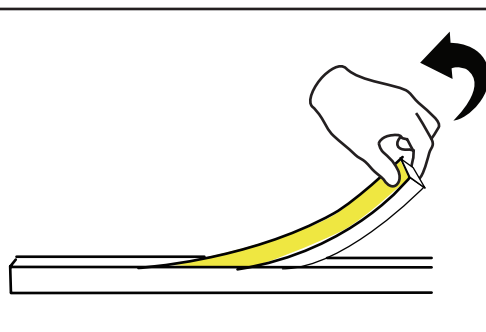


If the length of LED strip is over 2m, it is recommended to removed by two persons.


HAVIFLEX INSTALLATION INSTRUCTIONS

Instructions for Cutting and Soldering:


- 1.** Cut the LED strip to required length
The minimum cutting unit should be subject to the mark of LED strip

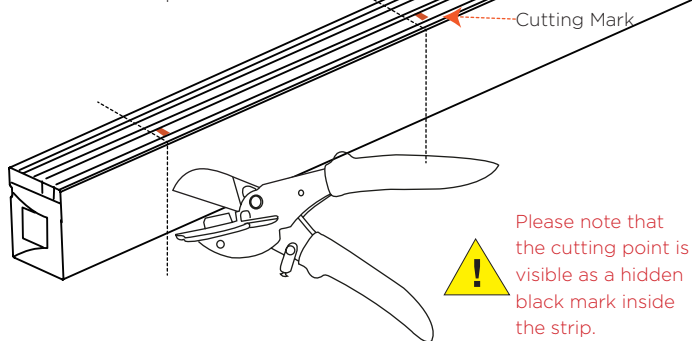


- 2.** Cut out a piece of light strip with proper dimensions according to requirements

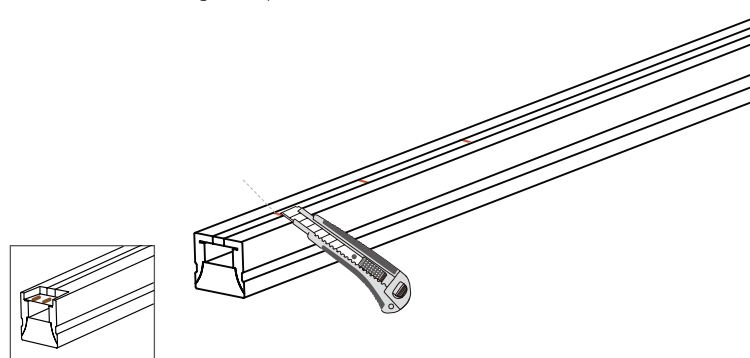


- 3.** Connect the wires with the LED strip using solder and soldering iron
(pay attention to positive and negative poles)

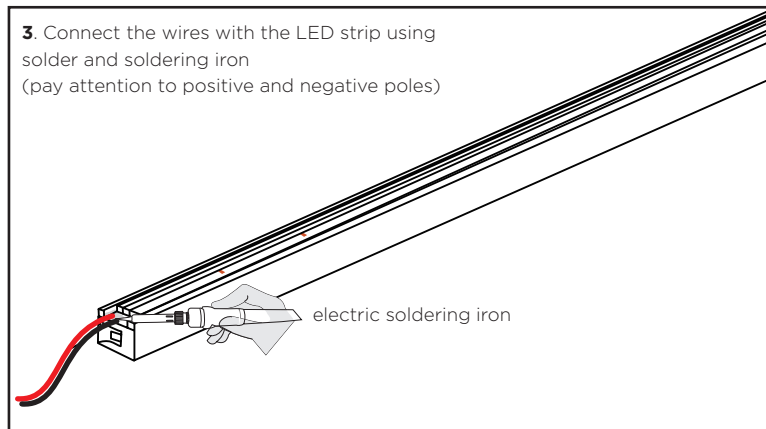

- 4.** Place the plug with a hole into the wires and inject Silicon into the cap.

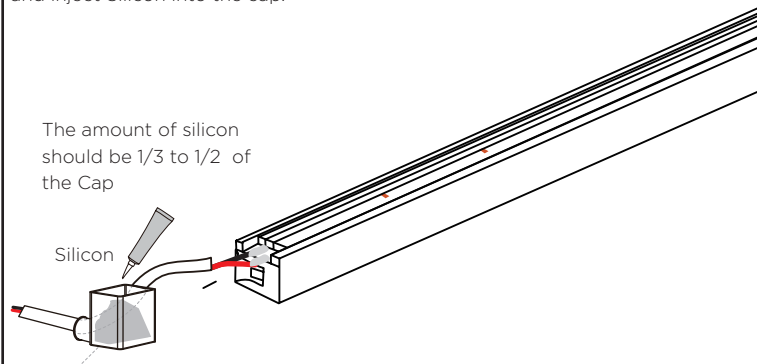


- 5.** Push the cap onto the LED strip

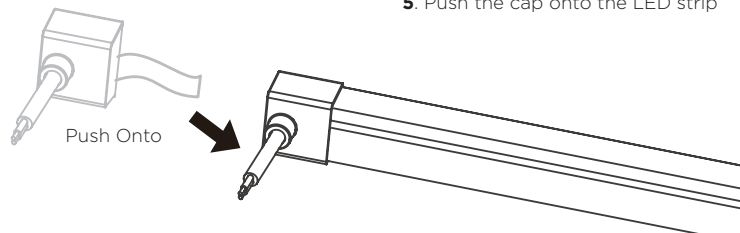

After injecting silicon, the LED strip should be placed horizontally for two hours until the plug surface is dry, and then to finish the operation of plug end .

- 6.** Fill the end of LED strip with filler, then push the Cap onto the end of LED strip.

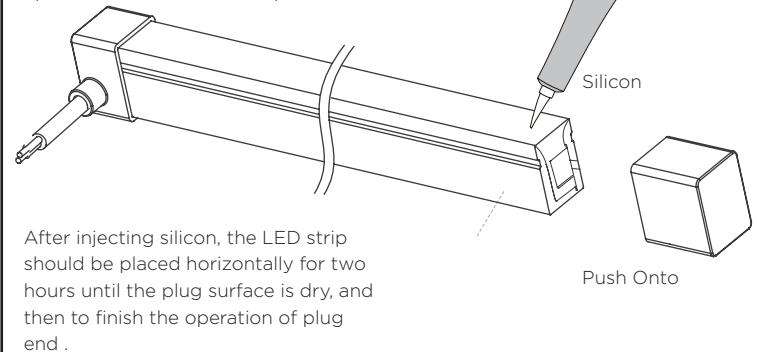

Notes:

- Only the parts with cutting marks can be cut when it is necessary to cut the silicone neon strip according to the on-site installation length;
- When installing in Channel and in a facing down direction, an adhesive or double sided tape must be applied to prevent Haviflex from falling out of channel.
- Use a 24V DC isolated power supply to drive the silicone neon strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the silicone neon strip.
- When connecting multiple silicone neon strips. Wiring must be done in Parallel. Attention should be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.
- Silicone neon strip should be placed in a dry and sealed environment. It is suggested that the storage period cannot be too long. Working temperature: -20°C- +45°C; storage temperature: 0°C- +60°C
- In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product;
- Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock;
- On the premise of required direction (the top view is not same as the side view), please do not bend the strip into an arc with a diameter less than 30mm to ensure the longevity and reliability.

Product Warranty Description


A three-year warranty is provided for products used under normal operating conditions. If a fault occurs within the warranty period and, following inspection by Havit Lighting, is confirmed to be quality-related, a replacement LED strip will be offered.

The warranty does not cover the following:

- Product damage caused by use outside the instructions provided.
- Product damage caused by disassembly, incorrect handling, or improper operation by the user.
- Severe appearance damage or deformation of the product.
- Installation outdoors using aluminium channel.
- Installation in floor areas where foot traffic may occur.

Sample Wiring Diagrams

Single Colour

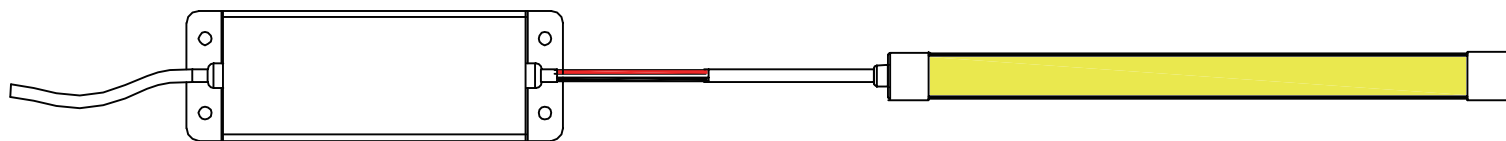

Notices

1. The products are subject to thermal expansion as a result of the changes in temperature to which they are subject. This thermal expansion must be taken into account in installations subject to a wide range of temperature.
2. When cleaning use only water and methylated spirits.
3. IP67 protection on the product and the continuous line system.
4. Product is not suitable for use in swimming pools and fountains.