

# Zigbee Single Colour LED Remote Controller




## PRODUCT SPECIFICATIONS

- Material:** Plastic
- Colour:** Black
- LED Strip Type:** Single Colour
- No. of Zones:** 1
- Input Voltage:** 4.5v DC (3x AAA Batteries)
- Output Signal:** 2.4Ghz
- Transmitting Range:** Up to 30m
- IP Rating:** IP20
- Dimmable:** Yes (0.1% - 100%)
- Warranty:** 2 Years Replacement\*\*



## DIMENSIONS

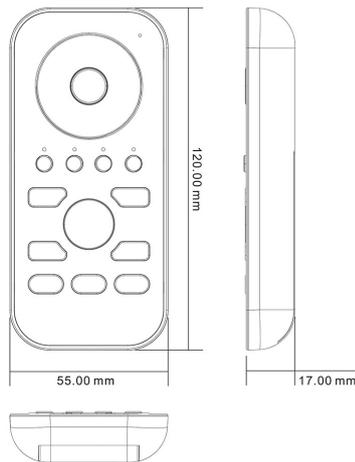

## COMPATIBLE WITH




- HV9105-ZB-DIM
- HV9105-ZB-ACDIM

## IP RATING



## OPERATING INSTRUCTIONS

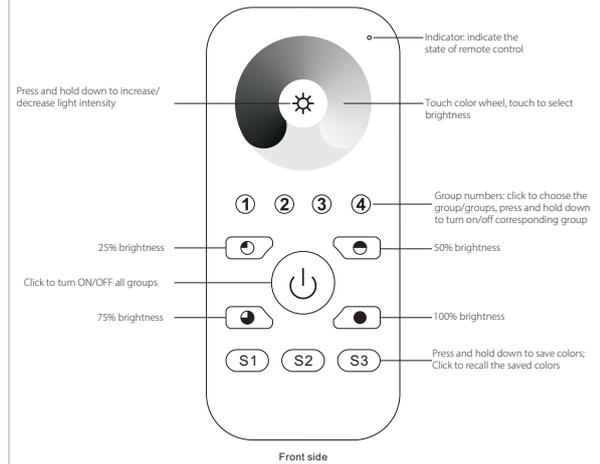

## Product Ordering

### IMAGE

### PART NUMBER




**HV9102-ZB-SCREM**

### TouchLink to a Zigbee Lighting Device

**Step 1:** Set the zigbee lighting device to start TouchLink commissioning, please refer to its manual to learn how.

**Step 3:** Short press any button to choose a group to touchlink.

**Step 4:** Press and hold down until LED indicator turns on.

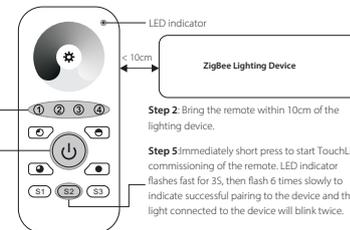

**Step 2:** Bring the remote within 10cm of the lighting device.

**Step 5:** Immediately short press to start TouchLink commissioning of the remote. LED indicator flashes fast for 3s, then flash 6 times slowly to indicate successful pairing to the device and the light connected to the device will blink twice.

Note: 1) Directly TouchLink (both not added to a ZigBee network), each remote can link with 30 devices.

- 2) TouchLink after both added to a ZigBee network, each remote can link with max. 30 devices.
- 3) For Hue Bridge & Amazon Echo Plus, add remote and device to network first then TouchLink.
- 4) After TouchLink, the remote can control the linked lighting devices.

\*\* See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS:  
143 Beauchamp Road  
Matraville NSW 2036  
Australia

Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: sales@havit.com.au  
web: www.havit.com.au