


# Lisse Wall Light Installation Instructions




## Product Specifications

Model No.	HV3652T-BLK-240V	HV3652T-WHT-240V	HV3653T-BLK-240V	HV3653T-WHT-240V	HV3652T-BLK-12V	HV3652T-WHT-12V	HV3653T-BLK-12V	HV3653T-WHT-12V
Name	Lisse							
Material	Aluminium							
Colour	Black	White	Black	White	Black	White	Black	White
IP Rating	IP54				IP54			
Protection Class	1 (240v Requires Earth) ⚡				3 (Low Voltage) ⚡			
Input Voltage	240v AC				12v DC			
Lamp Base	Built in LED				Built in LED			
Lamp Wattage	1x 12w		2x 12w		1x 12w		2x 12w	
Colour Temp	TRI Colour - 3000k, 4000k, 5500k				TRI Colour - 3000k, 4000k, 5500k			
Lumens	475lm, 560lm, 515lm		2x 475lm, 2x 560lm, 2x 515lm		475lm, 560lm, 515lm		2x 475lm, 2x 560lm, 2x 515lm	
CRI	> 80				> 80			
Wiring	Parallel				Parallel			
Dimmable	No				No			
Warranty	3 Years Replacement*				3 Years Replacement*			


### HV3652 Dimensions

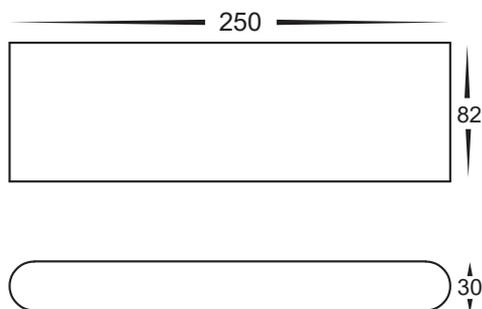

### HV3653 Dimensions

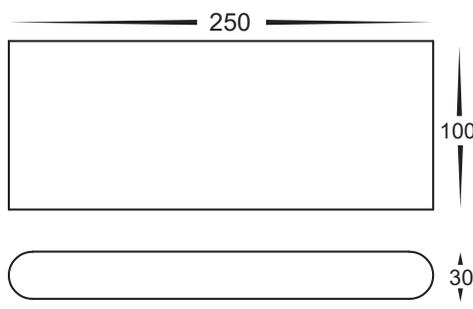

### Mounting Base Diagram

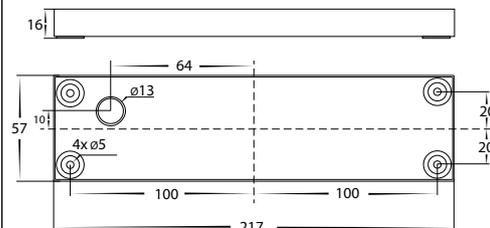

### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

### Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Loosen allen screws from side of fitting.
3. Remove base plate from fitting.
4. Install base plate to wall in desired location using appropriate screws for application.
5. Seal all holes including cable entry and around screws
6. 240v Models
  - - Use wire with earth; connect the earth first, then live and neutral wire.
7. 12v DC Models, Use an appropriate 12v DC LED Driver - **DO NOT CONNECT LIGHT FITTING DIRECTLY TO 240V** -
  - Connect Live and then neutral.
8. Fitting is preset to 3000k, to change slide switch located inside base of fitting to desired colour temperature.
9. Reattach fitting to base plate making sure screws are tight to avoid any water penetration.
10. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
11. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Must be installed by a licensed electrician

### Contact Details:

143 Beauchamp Road  
Matraville NSW 2036  
Australia

Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: sales@havit.com.au  
Web: www.havit.com.au

### Warranty Terms & Conditions\*



### Additional Information

