


Bayside Wall Light Installation Instructions



Product Specifications

Model No.	HV3659W-BLK	HV3659W-WHT	HV3659W-SS316
Name	Bayside		
Material	316 Stainless Steel		
Colour	Black	White	Stainless Steel
IP Rating	IP54		
Protection Class	1 (240v Requires Earth) ⚡		
Input Voltage	240v AC		
Lamp Base	E27		
Lamp Wattage	1x 9w		
Colour Temp	3000k		
Lumens	800lm		
CRI	> 80		
Wiring	Parallel		
Dimmable	Yes - Triac Dimmable		
Warranty	3 Years Replacement*		

Dimensions

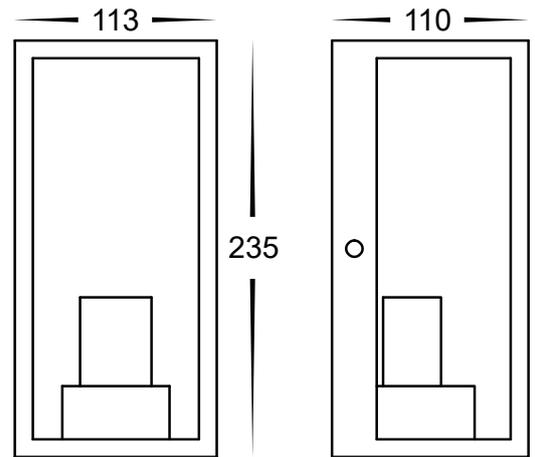

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on fitting. (Warranty does not cover Tea Staining).
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Install bracket to wall in desired location using appropriate screws for application.
3. Remove base from fitting by removing screws on side and set aside.
4. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire.
5. Seal all holes including cable entry and around screws
6. Attach fitting to bracket making sure nuts are tight.
7. Attach front cover to base making sure screws are tight.
8. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Steps for changing globe:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove the cover by removing screws on side of fitting and set aside,
3. Remove globe by twisting anti clockwise.
4. Re-insert the appropriate globe by inserting globe into lampholder and twist clockwise - (Make sure not to exceed max wattage, see product label for correct info.
5. Reattach front cover to base making sure screws are tight.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

