



20w 24v DC 896LED RGBC + RGBW COB LED Strips


Watts Per Metre	20w
Input Voltage	24v DC
IP Rating	IP20 IP54 IP67
Colour Temp	RGBC (RGB + 5500K) RGBW (RGB+ 3000K)
Lumens	500lm
Beam Angle	120°
Size	IP20: 12mm (W) x 2mm (H) IP54: 12mm (W) x 3mm (H) IP67: 16mm (W) x 6mm (H) IP67 Including End Caps
PCB	3oz
Wiring	Parallel
Lamp Expectancy	<50,000hrs
CRI	CRI>80
Dimmable	Yes - With RGBC or RGBW Controller
LED Chip Type	COB
Compatible Driver	Non-Dimmable
No. of Chips Per Metre	896
Maximum Cut Length	5000mm
Cutting Increments	50mm
Mounting	Aluminium Profile or Heat Sink
Operating Temperature	0 - + 60° Celcius
Ambient Temperature	-20° - + 50° Celcius
Warranty	3 Years Replacement

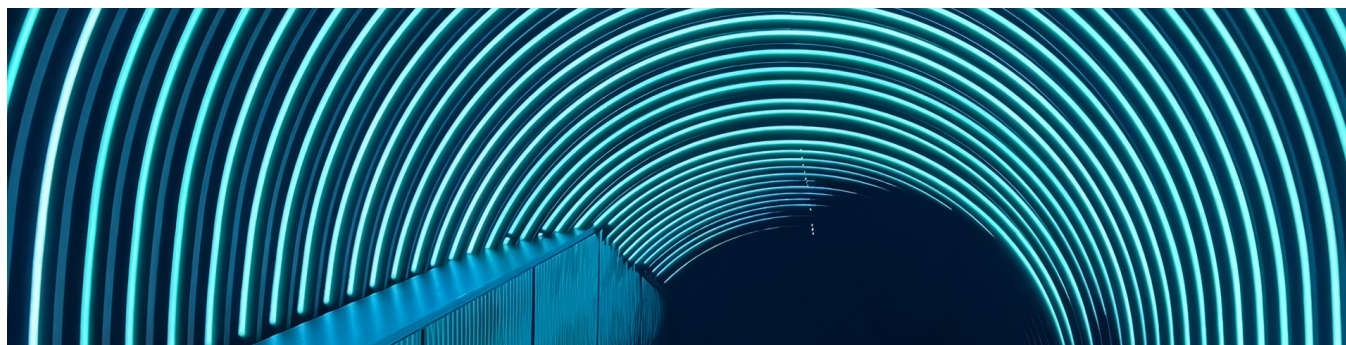


IP20 12mm (W) x 2mm (H) LED Strip Dimensions

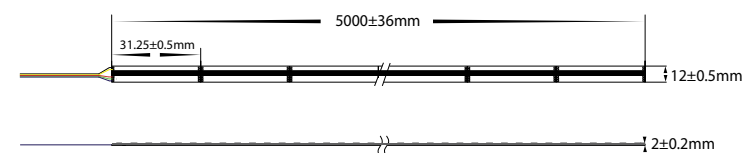

IP54 12mm (W) x 3mm (H) LED Strip Dimensions

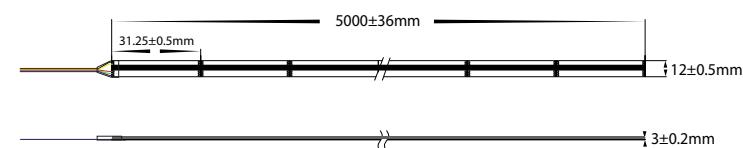

IP67 16mm (W) x 6mm (H) LED Strip Dimensions

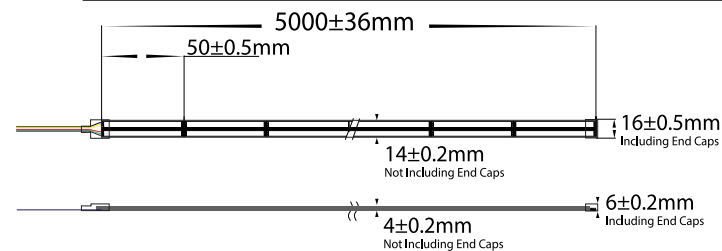

Product Ordering





24v DC 896LED RGBC + RGBW COB LED Strips - Per Metre

Image	Part Number	Colour Temp	Lumens	Barcodes
	HV9761-IP20-896-RGBC (RGB + 5500K) IP20		500lm	9350418036544
	HV9761-IP54-896-RGBC (RGB + 5500K) IP54			9350418037626
	HV9761-IP67-896-RGBC (RGB + 5500K) IP67			9350418037664
	HV9761-IP20-896-RGBW (RGB + 3000K) IP20			9350418036568
	HV9761-IP54-896-RGBW (RGB + 3000K) IP54			9350418037640
	HV9761-IP67-896-RGBW (RGB + 3000K) IP67			9350418037688

24v DC 896LED RGBC + RGBW COB LED Strips - Reels

Image	Part Number	Colour Temp	Lumens	Barcodes
	HV9761-IP20-896-RGBC-30M (RGB + 5500K) IP20 - 30M Reel		500lm	9350418036551
	HV9761-IP54-896-RGBC-10M (RGB + 5500K) IP54 - 10M Reel			9350418037633
	HV9761-IP67-896-RGBC-10M (RGB + 5500K) IP67 - 10M Reel			935041803761
	HV9761-IP20-896-RGBW-30M (RGB + 3000K) IP20 - 30M Reel			9350418036575
	HV9761-IP54-896-RGBW-10M (RGB + 3000K) IP54 - 10M Reel			9350418037657
	HV9761-IP67-896-RGBW-10M (RGB + 3000K) IP67 - 10M Reel			9350418037695

Examples of Compatible RGBC+W Controllers

Touch Panels	Remote Controllers
 HV9101-E4S  HV9101-EX8S  HV9101-EX4S 	 HV9102-Q4  HV9102-M4+M5-5A 
Zigbee	RF + WIFI
 HV9101-ZB-RGBWTP  HV9101-ZB-5C  HV9105-ZB-5C	 HV9101-2820  HV9102-2819RGBW  HV9105-1009-5C

Scan QR Code below to see the full range of compatible RGBC + RGBW LED Strip Controllers

Examples of Compatible Non-Dimmable Drivers

Indoor	Outdoor (Weatherproof)
 LED Driver Constant Voltage HYVRES-CV2000 Input: 100-240VAC, 50/60Hz, 0.25A Output: 12V, 1.0A, 12W, 200mA Efficiency: > 90% Power Factor: > 0.95 Temp: -40°C ~ +85°C CE RoHS HV9666	 Waterproof LED power supply HV9651 Input: 100-240VAC, 50/60Hz, 0.25A Output: 12V, 1.0A, 12W, 200mA Efficiency: > 90% Power Factor: > 0.95 Temp: -40°C ~ +85°C CE RoHS HV9651

Scan QR Code to see the full range of compatible Non-Dimmable LED Drivers



Scan to explore full
range of Non-Dimmable
LED Drivers



Scan to explore full
range of RGBC & RGBW
LED Strip Controllers