

Thank you for purchasing this product. for optimum performance and safety, please read the instructions carefully and keep the manual for future reference.

• Important Safety Notice

Please read below safety instructions carefully before installation and operation:

1. Do not mix up the transmitter unit (TX) and the receiver unit (RX), IR blaster extension cable and IR receiver extension cable before installation.
2. Do not hot plug when it is working.
3. Use DC5V power supply only. Make sure specification matched if using adapters not supplied by factory.
4. This HDMI Extender supports POE to power the receiver (Connect power supply to the transmitter only, and receiver is powered by the Transmitter). Please note that this HDMI Extender can not use with switch or router.

• Product Introduction

This HDMI Extender includes a transmitter unit (TX) and a receiver unit (RX), working as a pair. It allows for transmission and extension uncompressed full HD 1080p@60Hz HDMI signal via CAT6/6A/7 network cable, the transmission distance is up to 40 meters with zero latency. It is with an EDID switch for helping to set a needed HDMI signal format, also it supports PoE to power the receiver (Connect power supply to the Transmitter unit only, each unit will

power up, as the Receiver unit is powered by the Transmitter unit through network cable). This HDMI Extender support IR passback for remote control source device easily. This product is perfect for AV transmission in applications of HD conference system, HD video shooting, HD multimedia education system, HD digital advertising and signage etc.

• Product Features

1. Include a transmitter unit (TX) and a receiver unit (RX), working as a pair.
2. Support resolution is up to full HD 1080p@60Hz.
3. Use CAT6/6A/7 for long distance transmission.
4. Transmission distance up to 40 meters via CAT6 cable.
5. Uncompressed and zero latency.
6. With EDID switch for setting a very needed HDMI signal format
7. Support POE to power the receiver from transmitter.
8. Support IR passback for remote control source device from receiver site easily.
9. Plug and play, without installation.

• Package contents




Transmitter unit (Tx) ×1pcs



Receiver unit (Rx) ×1pcs



User manual ×1pcs

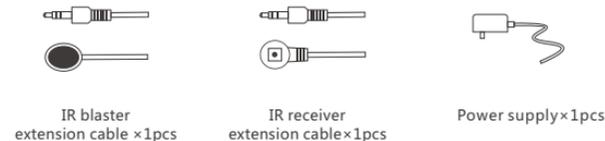


• Installation Requirements

1. HDMI source device (computer graphics card, DVD, PS3, HD monitoring equipment etc).
2. HDMI display device like SDTV, HDTV, projector with HDMI port.
3. UTP/STP CAT6/6A/7 cable, follow standard IEEE-568B.

• Penal Description


1. Transmitter unit (TX)

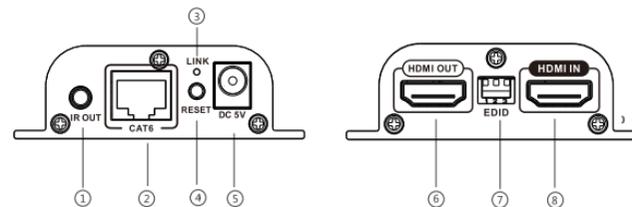

- ① IR signal output to connect with blaster extension cable
- ② RJ45 signal output
- ③ HDMI signal indicator led: it lights on all the time when HDMI signal input, flashes when no signal input

- ④ Reset button
- ⑤ DV5V power input
- ⑥ HDMI signal output
- ⑦ EDID switch
- ⑧ HDMI signal input

2. Receiver unit (RX)

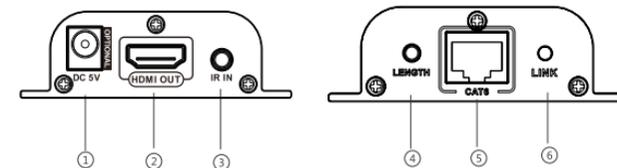

- ① DV5V power input
- ② HDMI signal output
- ③ IR signal input to connect with IR receiver extension cable
- ④ LENGTH: for adjusting to the length of network cable
- ⑤ RJ45 signal input
- ⑥ RJ45 indicator led: it lights on all the time when HDMI signal transmission, flashes when no signal transmission

• Installation and Connection


1. How to make a CAT6/6A/7 network cable

Follow the standard of IEEE-568B

1. white and orange; 2. orange; 3. white and green;
4. blue; 5. white and blue; 6. green;
7. white and brown; 8. brown.



2. Connection

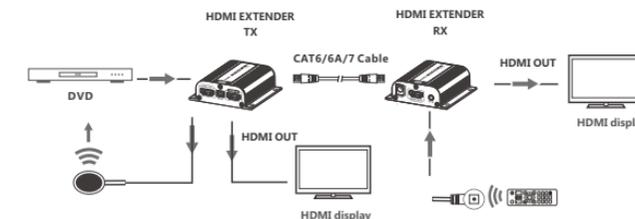

3.Connection instruction

- 3.1 Connect source device to Transmitter unit (TX), and display device to Receiver unit (RX) via HDMI cables
- 3.2 Connect Transmitter unit (TX) and Receiver unit (RX) via network cables (CAT6,CAT6A or CAT7)
- 3.3 Plug the power supply to Transmitter unit only, each unit will power up then initialize itself, this HDMI extender works

[NOTE] It is recommended to use a length range within 15~40m network cable. If the CAT6 cable is too short, there may be no display output because the signal is too strong. If the CAT6 cable is too long,the output may be with poor quality.

4. IR User Guide

- 4.1 IR blaster extension cable should plug in the IR OUT port of TX (Sender) of HDMI extender, and the IR receiver extension cable should plug in the IR IN port of the Video wall controller
- 4.2 The emitter of IR blaster should as close as possible to the IR receiver window of the signal source device.
- 4.3 Using the IR remote controller of the signal source device towards the IR receiver (connected to the Video wall controller), to remote control source media playback.

5. EDID Setting

- 5.1 HDMI source device reads the EDID information of the transmitter (TX) and then output the relative HDMI signal format
- 5.2 It needs to power on again or reset the transmitter unit after re-setting EDID every time
- 5.3 When connect a TV with loop-out HDMI port of transmitter(TX), it can adjust EDID switch to read and save this TV's EDID information. When we use this function, it should connect TV with transmitter first, and then power on these devices, so that the EDID will be read and saved successfully. At next time, even though do not connect a TV into the loop-out HDMI port, the source device will output the saved EDID information last time.

5.4 There are 7 build-in EDID status, and the default EDID is 720P60Hz CH2.1, and others could be selected by the EDID switch in the transmitter,the detail Setting Information shown as below:

-  Switch UP : use the Arabic numeral "1" to represent
-  Switch DOWN : use the Arabic numeral "0" to represent

Switch Status			EDID information
switch-1	switch-2	switch-3	
0	0	0	720P@50Hz 2.1CH
1	0	0	720P@50Hz 7.1CH
0	1	0	1080i@60Hz 2.1CH
1	1	0	1080i@60Hz 7.1CH
0	0	1	1080P@60Hz 2.1CH
1	0	1	1080P@60Hz 7.1CH
0	1	1	read and save the EDID of the loop-out TV
1	1	1	Default EDID: 720P@60Hz 2.1CH

• FAQ

- Q:** No image output or audio and video display is not normal?
- A:** Press Receiver "LENGTH" button for adjusting this unit to self -adapt to the length of network cable.
- Q:** Receiver "LINK" led is flashing all the time?
- A:** 1) 1)Make sure network cable connection follows the standard of IEEE- 568B.
2) Check whether Transmitter has HDMI signal input.
3) Reset Transmitter & Receiver and reconnect.
- Q:** Receiver "LINK" led lights on all the time but no image output?
- A:** 1) Press Receiver "LENGTH" button for adjusting to the length of network cable
2) Make sure HDMI cable is well connected with TV.
3) Make sure the network cable is fine copper wires.

• Specification

Item	Specification
HDMI signal	HDMI1.4a
HDCP	HDCP1.2a
Support resolutions	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 3D:1080p@60Hz
Network cable	Low resistance and consumption oxygen-free copper core (CAT6、CAT6A、CAT7)
Transmit distance	Full HD resolution 1080p@60Hz up to 40meters via cat6 cable
IR remote control	Support 20~60kHz wide frequency IR remote control
EDID	Support EDID setting function
Audio format	PCM、AC3、DTS
Working temperature	0°C ~ 60°C
Power supply	5V2A
Power consumption	TX<3W RX<3W
Product dimension	71.6(L)×66.9(W)×22.6(H)mm *2pcs
Weight	TX:70g RX: 70g
Color	Black

Disclaimer

The product name and brand name may be registered trademark of related manufacturers.TM and ® may be omitted on the user manual. The pictures on the user manual are just for reference,and there may be some slight difference with the real products. We reserve the rights to make changes without further notice to a product or system described here in to improve reliability,function or design.

HDMI EXTENDER

User Manual

EDID

