




PROJECT PROPACK CCT DOWNLIGHT & SOCKET (20-PACK)

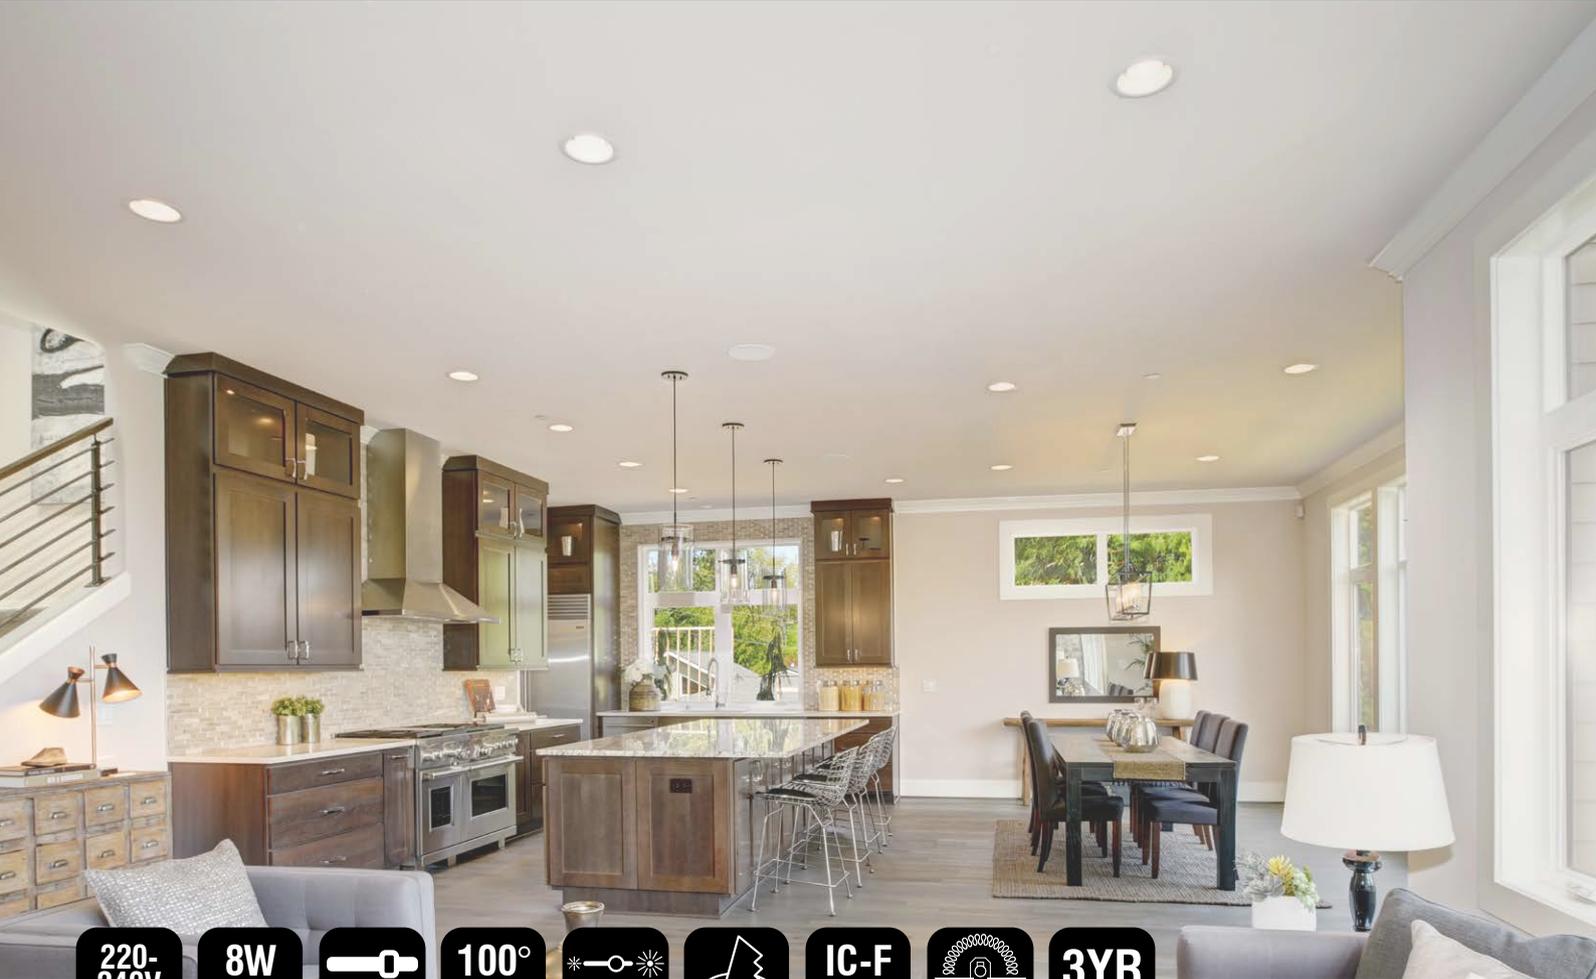

220-240V AC **8W** 800lm MAX **TRI-COLOUR CCT** **100°** BEAM SPREAD **DIMMING** **92mm** **IC-F** ABUTTED & COVERED **IC-4** **3YR** WARRANTY

An 8W colour temperature changing and dimmable LED downlight the delivers a high level of lumens with a lower wattage output. It's cost effective solution with outstanding performance.

- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4200K to bright daylight 5000K.
- Matt white housing with frost white diffuser.
- Flush frame design for a seamless look.
- IP44 rated - Front Fascia ONLY.
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- SAA approved with integrated dimmable driver.

APPLICATIONS

- Ideal for any residential or commercial interior space.






PROJECT PROPACK CCT DOWNLIGHT & SOCKET (20-PACK)

TECHNICAL SPECIFICATIONS

Operating voltage:	220-240V / 50Hz
Class:	Class II (2)
Wattage:	8W Total
Lumens:	700 Total lumens (3000K) 800 Total lumens (4200K) 750 Total lumens (5000K)
Colour temperature:	3000°K (Warm white) 4200°K (Cool white) 5000°K (Daylight)
Beam angle:	100 degrees
Colour rendering index:	80
Power factor:	>0.9
Dimmable:	Yes
Rated lifetime:	25,000hrs+ @25°C Ambient (When covered with thermal insulation)
Construction:	PC Thermal Conductive Plastic Housing, PC Diffuser
Operating temperature:	TA: 25 degrees Celsius
Warranty:	3 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2

INSTALLATION

Must be installed by a licensed electrician

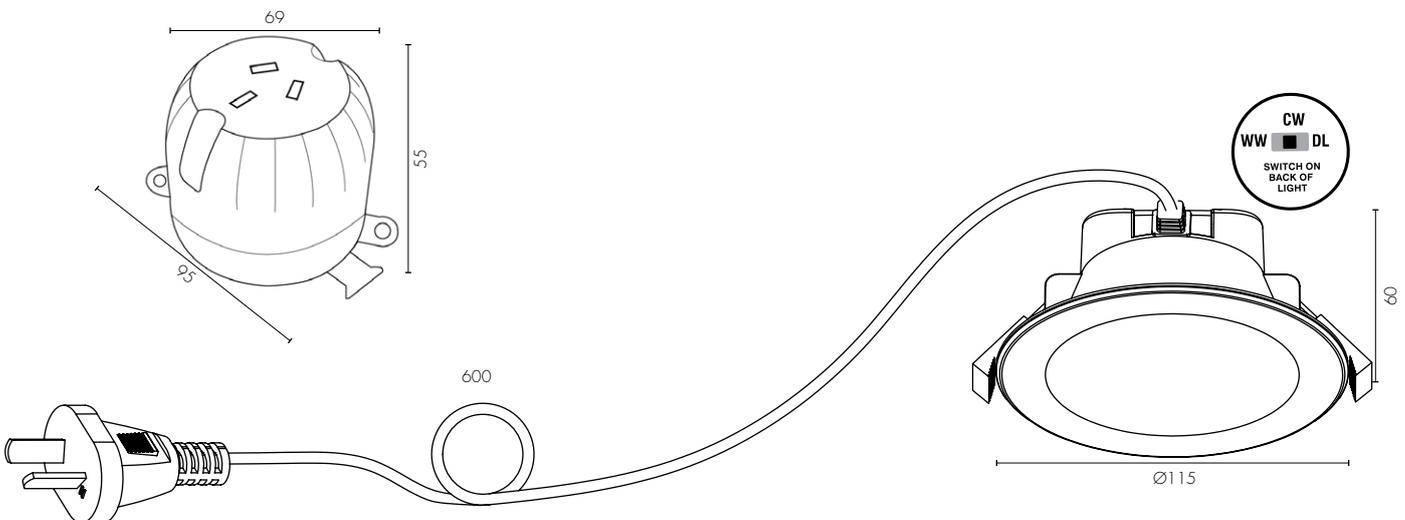

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21996/05	White	Project Propack 8W Downlight and Socket (20PK)	W360 x H250 x D330 mm		1x 20 pc	 9 312641 219965 >