



UMBRA TRIO LED CCT DOWNLIGHT



The ideal downlight for new or existing downlight installs. Its fixed design provides a wide angled diffused beam. Change the colour temperature from warm white to cool white or natural light, using the switch located on the back of the unit.

- Fixed head, flush fascia downlight that easily integrates with ceiling.
- Flex & plug (Total length 0.6m).
- Delivers a high level of lumens with a lower wattage output.
- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4000K to natural light 5000K using the switch located on the back of the unit.
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- IP44 rated (front only).
- SAA approved with integrated dimmable driver with 600mm flex & plug.

APPLICATIONS

- Ideal for any residential or commercial interior space






UMBRA TRIO LED CCT DOWNLIGHT

TECHNICAL SPECIFICATIONS

Operating voltage:	220-240V / 50Hz
Class:	Class II (2)
Wattage:	8W Total
Lumens:	700 Total lumens (3000K) 750 Total lumens (4000K) 750 Total lumens (5000K)
Colour temperature:	3000°K (Warm white) 4000°K (Cool white) 5000°K (Natural)
Beam angle:	100 degrees
Colour rendering index:	≥82
Power factor:	≥0.90
Dimmable:	Yes
Rated lifetime:	30,000hrs @25°C Ambient (When covered with thermal insulation)
Construction:	PC Thermal Conductive Plastic Housing, PC Diffuser
Warranty:	3 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2

INSTALLATION

Must be installed by a licensed electrician

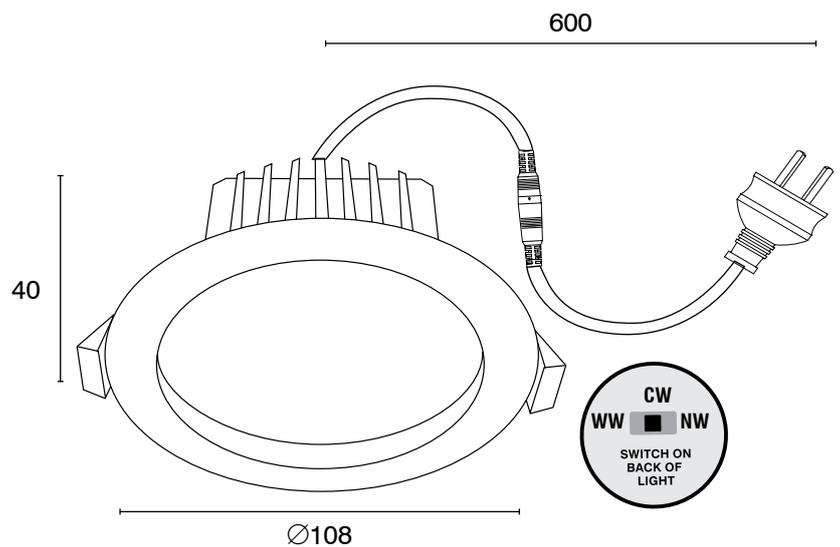

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21932/05	White	Umbra Trio CCT Downlight	W105 x H75 x D126 mm	0.22 kg	1 pc	 9 312641 219323 >
OUTER CTN	21932/05	White	Umbra Trio CCT Downlight		9.400 kg	40 pc	 19312641219320