

Fixed Fibre Enclosure (FOBOT)

FPP1RUFX



DESCRIPTION

The fixed fibre enclosure comes with a rodent proof backing plate for an advanced solution, designed to accommodate both field-terminated and pre-terminated fibre applications. This versatile enclosure provides a secure and organized solution for fibre optic splicing and termination.

APPLICATIONS

- Splicing tight buffered or loose-tube cables
- Terminating fiber optic cables directly, using quick connects or epoxy field termination
- Installing pre-terminated cable assemblies with glands

FEATURES

- 2 x 24F splice cassettes
- Latched lid allows for easy access to tray internals.
- Perfect for both Field terminated or Preterminated Fibre.
- 2 x adapter plate slots
- Flat rodent proof cable entry with knockouts offers excellent protection of terminations even in challenging environments

SPECIFICATION


Part Number	FPP1RUFX	
Description	Fixed Fibre Enclosure (FOBOT)	
Size WxHxD (mm)	482.6 x 44 x 225 mm	
Unit Weight (kg):	3.8kg	
Adapter panel capacity	2 x 12 port plate (flat or angled)	
Port capacity (fibre count)	24 SC,SCD, ST, FC / 48 LCD, LCQ	
Splice capacity	48F	
High density faceplate options	48 port LC flat faceplate	
Cable entry ports	4 x 20mm knockout slots	
Material and colour	Charcoal grey matte finish (RAL7016)	
Standard accessories	2 x 24F splice cassette, 2 x brass binding posts, 2 x M20 cable glands, 6 x cable ties, 6 x hook & loop, 48 x 45mm splice protector	
Optional accessories	Adapter plates, adapters and pigtails.	









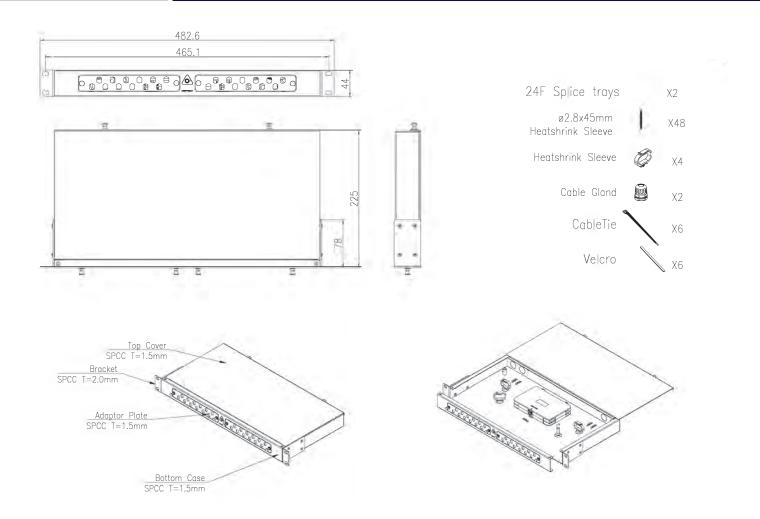

ACCESSORIES

	FPPLCD12FLAT	Flat 12 Port LCD / SCS Adaptor Plate
{	FPPLCD6ANG	Angled 6 Port LCD / SCS Adaptor Plate
	FPPLCD12ANG	Angled 12 Port LCD / SCS Adaptor Plate
	FPPSCD6FLAT	Flat 6 Port SCD / LCQ Adaptor Plate
	FPPSCD6ANG	Angled 6 Port SCD / LCQ Adaptor Plate
	FPPST12FLAT	Flat 12 Port ST Adaptor Plate
	FPPBLKP	Blank Panel for 1RU Fibre Enclosures





