


HDMIEXTSP1-8PRO

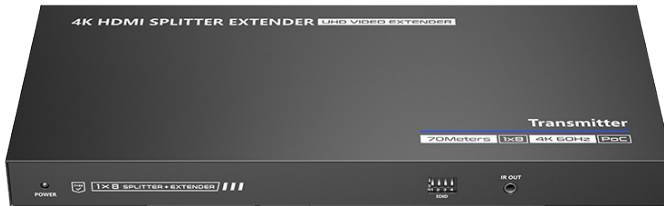

DESCRIPTION

This product is a 1 input 8 outputs extender splitter kit, which integrates the functions of distribution & extension. It distributes 1 HDMI input signal to 8 identical signal outputs, extends these signals up to 70 metres and supports 4K60Hz resolution. It also supports IR passback, RS-232 control and other functions.

FEATURES

- ipcolour STREAM
- 4K@60Hz
- 20m Wireless Transmission
- Channel Switchblade
- Low Latency
- SSID Pairing
- Compact Design
- Anti-interference

DETAILS

Transmission protocol	ipcolour
Distribution mode	1 IN 8 OUT
Transmission distance	CAT6/6A/7≤70m
Transmission distance	HDMI 2.0, HDCP 2.2
HDMI Resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz, 1280x960, 1280x800, 1280x768, 1680x1050, 1360x768, 1366x768, 1600x900, 1024x768, 800x600, 3840x2160@24/25/30/50/60Hz, 4096x2160@24/25Hz
Audio formats	LPCM/DTS-HD/DTS-Audio/Dolby Digital 5.1
IR	Support IR passback function (20KHz~60KHz)
RS-232	3 pin: TxD-RxD-GND, follows RS-232 levels
Working temperature	-20~60°C
Storage temperature	-30~70°C
Humidity (no condensation)	0~90% RH
Protection	ESD protection 1a Contact discharge level 2 1b Air discharge level 3 Implementation of the standard: IEC61000-4-2 Lightning protection Surge protection
Power supply	TX: DC12V/5A
Power consumption	TX + RX:50W

DETAILS

Colour	Black
Weight	TX: 731g RX: 243g
Dimension	TX: 264.0(L) x 120.0(W) x 23.0(H) mm RX: 105.5(L) x 102.5(W) x 20.0(H) mm

