


Recessed CFL wall lights available in a choice of trim options.

Specification

- Pressure die-cast construction in low copper aluminium alloy
- Polyester powder coat paint finish in textured RAL 9005 black
- Vandal resistant opal polycarbonate diffuser as standard
- Etched and toughened glass diffuser available upon request
- Energy saving compact fluorescent lamp options with integral modular gear trays
- Stainless steel exposed fasteners
- Silicone rubber seals provide IP55 weather protection
- Installation blackout to be ordered separately
- Other RAL colours available to indent order

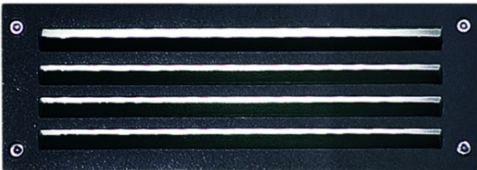

Quick Spec

Pierlite Avoca IP55 recessed wall light in die-cast LM6 aluminium with polycarbonate lens. Polyester powdercoat in RAL 9005 black, with optional recessing well or glass diffuser.

Design Application

Recess into walls or columns to provide ambient lighting along paths and corridors.

Product Codes

Code	Version	Dim (mm)	Mass (kg)
AVO18104	18W PLC Louvred face	260 x 100 x 135	1.5
AVO18304	18W PLC with hood	260 x 100 x 135	1.5
AVO18004	18W PLC Open face	260 x 100 x 135	1.5
AVO13303	13W PLC with hood	260 x 100 x 135	1.5
AVO13103	13W PLC Louvred face	260 x 100 x 135	1.5
AVO13003	13W PLC Open face	260 x 100 x 135	1.5

Accessories

AVOBLO	Installation Blackout
--------	-----------------------

