

LED LINEAR & PROFILES

LED LINEAR FITTING

SL3147/306, SL3147/312 FLORIO

CONSTRUCTION

- Extruded aluminium frame
- Powder coated steel base
- Opal polystyrene diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted

INSTALLATION TYPE


- Surface mounted
- Suspension unit required (SSI1512 or SSY1512)

DIMMING OPTIONS



- Trailing edge dimming
- Analogue dimming (1-10V dimming)
- Digital dimming (DSI, DALI)

DIMENSIONS


SL3147/306

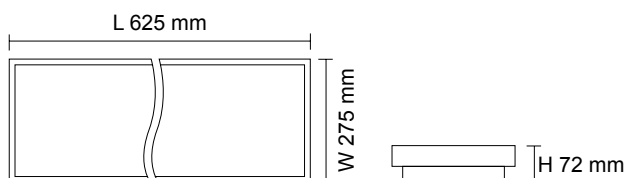

SL3147/312

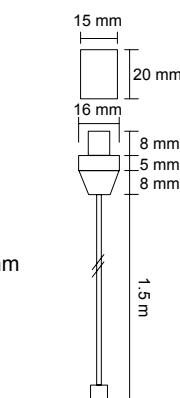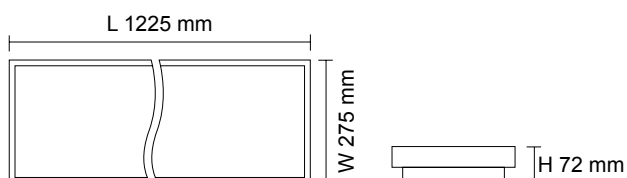

SSI1512
"I" CONNECTION

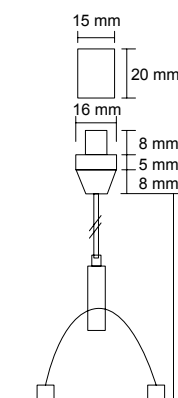

SSY1512
"Y" CONNECTION



Suspension wire unit

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
SL3147/306 CW	240V	21W	1400lm	4000K	>80	110°	Silver
SL3147/312 CW	240V	41W	2800lm	4000K	>80	110°	Silver