




LED DOWNLIGHTS INSTALLATION INSTRUCTIONS



www.sal.net.au


DIMMABLE LED DOWNLIGHT S9066 WAVE



1. Please read the data in this table before usage

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
S9066WW/WH	240V	14W	1200lm	3000K	>80	90°	Yes	White
S9066CW/WH	240V	14W	1250lm	4000K	>80	90°	Yes	White
S9066DL/WH	240V	14W	1300lm	6000K	>80	90°	Yes	White

2. Please pay attention to installing method & the spacing between parts, making appropriate holes according to the luminaire specifications

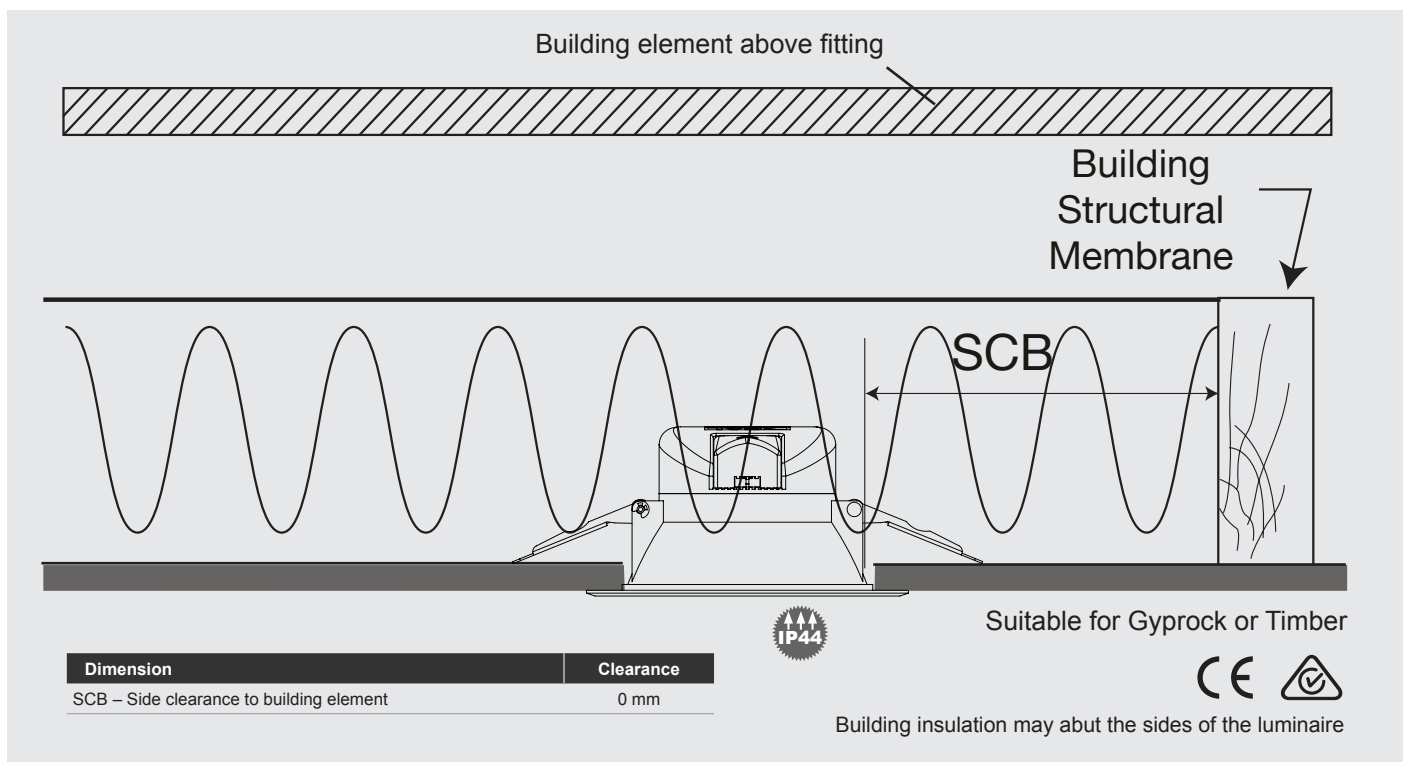

- Disconnect the electricity on the circuit that you are working on
- Cut out size Ø 125 mm for the downlight
- Then install a surface socket
- Insert a plug into the socket
- Finally place the fitting into the ceiling

IP RATING

- IP44 weatherproof front only

IMPORTANT SAFETY ISSUES

- This product must be installed by a qualified electrician according to AS/NZS 3000
- Ensure that the electricity is disconnected before any installation
- This product is NOT suitable for damp or explosive environments
- Modification of this product will void any warranty
- Lamps should always be installed or replaced with care
- Relamping only can be done when the power is off & the lamp is completely cooled down

- When a lamp is to be cleaned, switch off the fixture & let it cool down completely. Clean the fixture with a soft cloth & a standard PH neutral detergent. Stainless steel finishing should be maintained regularly

WARRANTY

This product is subject to standard warranty from SAL (Sunny Australia Lighting). Any modification of the products or NOT abiding by the above mentioned installation instructions will void the warranty.