

LED STRIPS



www.sal.net.au

12V LOW VOLTAGE LED STRIP IP44

FL1209/S

12V LOW VOLTAGE LED STRIP IP67

FL1209/SR

CONSTRUCTION

- High efficiency SMD LED chips
- Silicon coated
- Max. roll length 5 m, cuttable every 25 mm at scissors symbol
- Connection length can be extended by certain LED drivers, controllers and repeaters
- Dimmable with compatible controller or dimming LED driver
- Heat sink and 12V LED driver required



SUITABLE LED DRIVER

- PLUTO EGL12V/15W
- PLUTO 30W/12V
- PLUTO 50W/12V
- PLUTO 100W/12V
- PLUTO 200W/12V
- DIM40W/12V

FL1209/S – LED CHANNEL REQUIRED

LED Channel options: SLT1000, SLT2000, SLT3000, SLT4000, SLT4050, SLT5000

DIMENSIONS

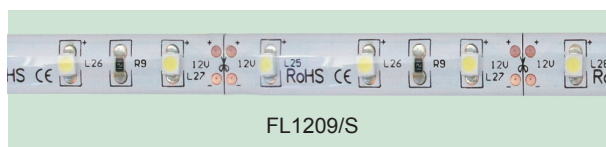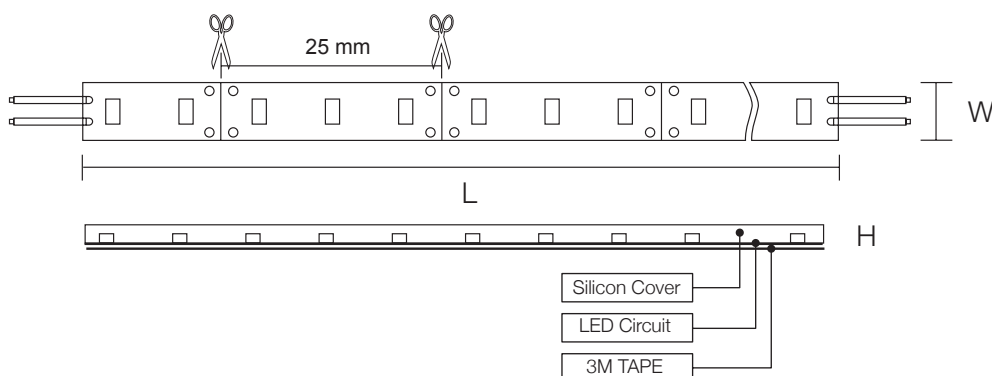

FL1209/S



FL1209/SR

FL1209/SR – SUFFICIENT HEATSINK REQUIRED

DIMMING OPTIONS

TYPE A

- Trailing edge dimmer with DIM40W/12V

TYPE B

- LT8903DIM
- LT8905DIM
- LT8904DIM/RP

Model No.	Input	Power	Lumen	Beam Angle	Colour Temp	CRI (Ra)	Cuttable Length	Dimensions W x H	IP	LED Quantity
FL1209WW/S	12V/DC	9W/m	500lm/m	115°	3000K	>80	25mm	10 x 3 mm	44	120ea/m
FL1209CW/S	12V/DC	9W/m	500lm/m	115°	4000K	>80	25mm	10 x 3 mm	44	120ea/m
FL1209DL/S	12V/DC	9W/m	500lm/m	115°	6000K	>80	25mm	10 x 3 mm	44	120ea/m
FL1209WW/SR	12V/DC	9W/m	400lm/m	115°	3000K	>80	25mm	12 x 4.5 mm	67	120ea/m
FL1209CW/SR	12V/DC	9W/m	400lm/m	115°	4000K	>80	25mm	12 x 4.5 mm	67	120ea/m
FL1209DL/SR	12V/DC	9W/m	400lm/m	115°	6000K	>80	25mm	12 x 4.5 mm	67	120ea/m