




## LED DOWNLIGHTS INSTALLATION INSTRUCTIONS



www.sal.net.au


# DIMMABLE LED DOWNLIGHT 3 COLOUR TEMPERATURES SELECTABLE S9076TC PREMIER



1. Please read the data in this table before usage

Model No.	Input	Power	LED Current	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
S9076TC WH	240V	40W	1050mA	3600/3900/3900lm	3000/4000/5700K	>80	90°	No	White

2. Please pay attention to installing method & the spacing between parts, making appropriate holes according to the luminary specifications

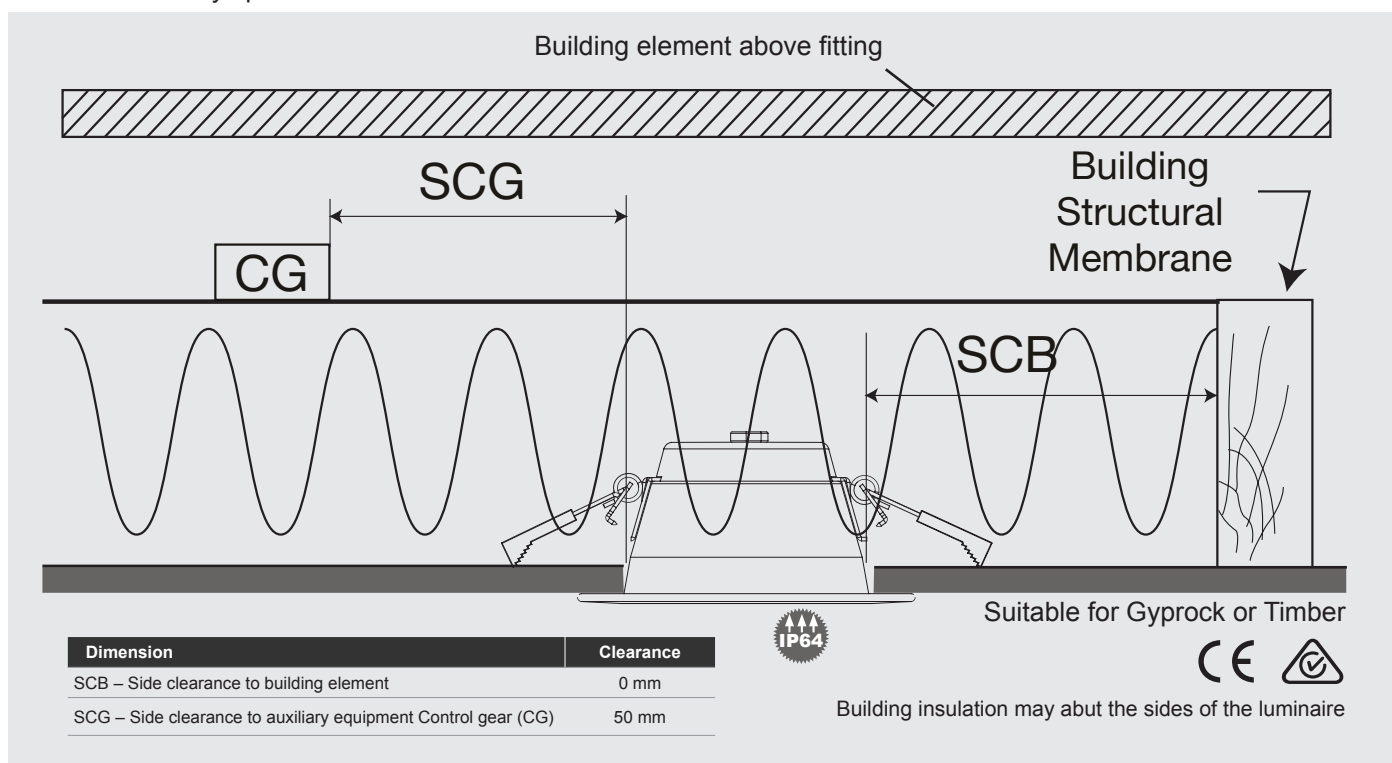



- Disconnect the power at the switch board
- Ensure a surface socket is in place within 1 m of desire position
- Cut out Ø240 mm hole for the downlight at the desire position
- Use dip switch to select desired colour temperature
- Insert the plug into the surface socket
- Fit the downlight into the ceiling
- Restore power

### IP RATING

- IP64 weatherproof front only

### IMPORTANT SAFETY ISSUES

- This product must be installed by a qualified electrician according to AS/NZS 3000
- Ensure that the electricity is disconnected before any installation
- This product is NOT suitable for damp or explosive environments
- Modification of this product will void any warranty
- Lamps should always be installed or replaced with care
- Relamping only can be done when the power is off & the lamp is



completely cooled down

- When a lamp is to be cleaned, switch off the fixture & let it cool down completely. Clean the fixture with a soft cloth & a standard PH neutral detergent. Stainless steel finishing should be maintained regularly

### WARRANTY

This product is subject to standard warranty from SAL (Sunny Australia Lighting). Any modification of the products or NOT abiding by the above mentioned installation instructions will void the warranty.