

LED LINEAR & PROFILES

LED WIRE GUARD BATTEN

STG/106, STG/206, STG/112, STG/212 TUBELINE

CONSTRUCTION


- Pressed steel base with PVC housing
- Powder coated finish
- High efficiency LED T8 tubes fitted
- Powder coated steel wire guard
- Large terminal block, easy installation
- Safety fuse installed

APPLICATIONS


- Offices
- Stations
- Garages
- Industrial

DIMENSIONS (REFER TO PAGE 95)


STB

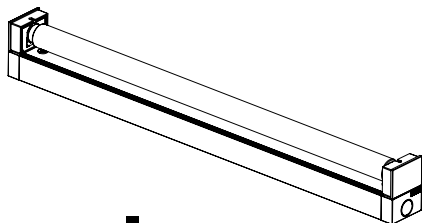

STW

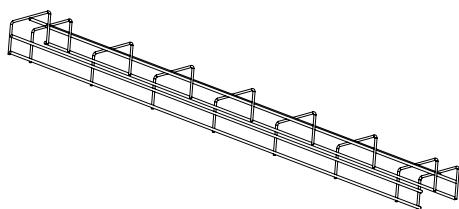

STG

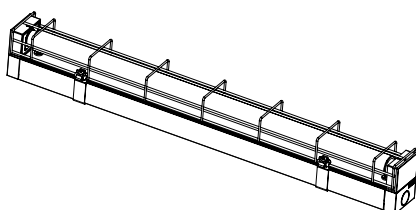

STG/112




STG/106



STG/212



STG/206



LED LINEAR & PROFILES



www.sal.net.au

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/106 WW	240V	9W	800lm	3000K	>80	120°	White
STG/112 WW	240V	18W	1700lm	3000K	>80	120°	White

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/106 CW	240V	9W	850lm	4000K	>80	120°	White
STG/112 CW	240V	18W	1750lm	4000K	>80	120°	White

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/106 DL	240V	9W	900lm	6000K	>80	120°	White
STG/112 DL	240V	18W	1800lm	6000K	>80	120°	White

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/206 WW	240V	18W	1600lm	3000K	>80	120°	White
STG/212 WW	240V	36W	3400lm	3000K	>80	120°	White


Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/206 CW	240V	18W	1700lm	4000K	>80	120°	White
STG/212 CW	240V	36W	3500lm	4000K	>80	120°	White

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
STG/206 DL	240V	18W	1800lm	6000K	>80	120°	White
STG/212 DL	240V	36W	3600lm	6000K	>80	120°	White

PHOTOMETRIC DATA



Unit: cd

STG/106CW C0/C180 ———
C90/C270 ———




STG/112 CW

STG/206 CW



STG/212 CW




EMERGENCY LED WIRE GUARD BATTEN

STG/206EM2500, STG/212EM2500 TUBELINE

EMERGENCY

- Compliant to AS2293
- Emergency classification:
 - » D32@C0, C180
 - » D20@C90, C270
- LED charge status indicator
- Test switch with self-test function
- 3 hours emergency operation
- Intelligent automatic recharging function
- 16 hours charge time
- Deep discharge protection
- SELV classified
- Non-maintained emergency

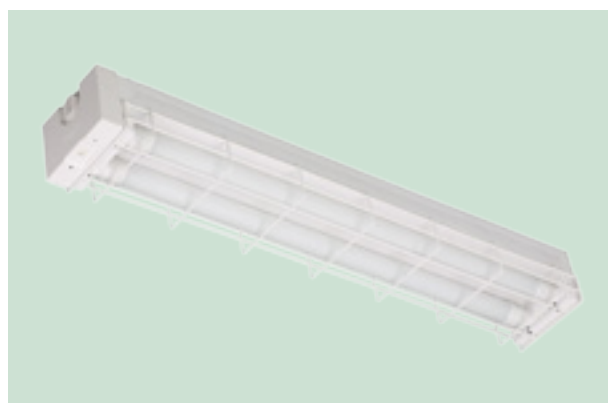

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Battery Capacity	Battery Voltage	Fitting Colour
STG/206EM2500	240V	18W/3W	1800lm/200lm	6000K	>80	120°	2500mAh	4.8V	White
STG/212EM2500	240V	36W/3W	3600lm/200lm	6000K	>80	120°	2500mAh	4.8V	White