

'2G SERIES' BOLLARD WITH REFLECTOR

LED

90°

DAYLIGHT

IP43

10W

Features

- Available with flat or dome top cover
- Interchangeable top for easy installation (Allen Key and spare shoulder screws included)
- Seven-tier louvre with mirrored reflector for exceled light distribution
- Corrosion-resistant powder sprayed black finish
- Lumens: >100lm = per Watt
- Lifespan (L70): 30 000hrs

Specifications

Surface mount installation
Die-cast aluminium body and base plate
Transparent polycarbonate cover
Light Type: LED COB
LED Driver: Non dimmable
Wattage: 10W
Voltage: 230V 50Hz
Colour Temp: 6000K
IP Rating: IP43



Measurements (Metric)

Base Plate Hole size: 10mm (M10)
Tapping size: 8.7mm

Top Cover Allen Key size: 3mm
Thread size: 6mm (M5)

Applications

Suitable for outdoor areas ie carpark, pathways, steps, lawns and garden areas

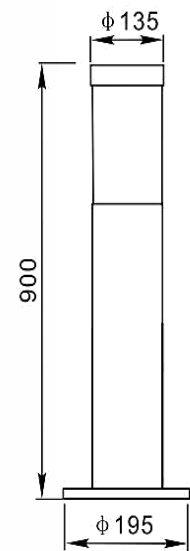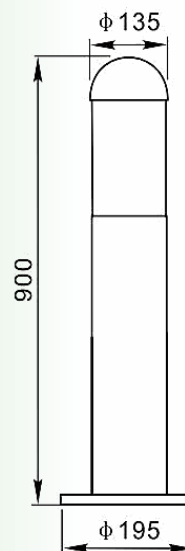

| Part No. | Type | Finish | Height | Body Ø | Base Ø | Weight | CTN QTY |
|----------|------|--------|--------|--------|--------|--------|---------|
| NLS20119 | Dome | Black | 900mm | 135mm | 195mm | 3.12KG | 4 |
| NLS20068 | Flat | Black | 900mm | 135mm | 195mm | 3.08KG | 4 |