

Description

The PLATINUM Series range of switches and socket outlets are the architects' choice at only 1mm thick. Manufactured from brushed stainless steel 316 material, ensuring it will not corrode in demanding applications. Mechanisms are rated at 240V AC 10AX, switch contacts are made from a silver nickel coating to prevent arcing and terminal screws are made from solid brass. All PLATINUM Series products come with a 10 Year InHouse Warranty. Available in stainless steel with either white or black, from 1 to 6 gang. 84mm screw centre mountings.

Features

- 1.2mm Thick
- Available in White and Black
- 316 Stainless Steel Brushed Grain
- Silver Nickel Composition Switch Contacts



1.2mm Thick

316 Stainless Steel Brushed Grain

Silver Nickel Composition
Switch Contacts

Approvals

Energy Safe Victoria

Technical Parameters

- Rated Voltage: 240V ac
- Rated Frequency 50Hz / 60Hz
- Complies with AS/NZ3133, 3100
- Overall Size: 131mm x 86mm
- Cut out: 96mm x 67mm

Light Switches				
Product Code	Rating (Amps)	No. Of Gangs	Configuration	Colour
SS-LS101V	10AX	1 gang	Vertical	SS/White
SS-LS102V	10AX	2 gang	Vertical	SS/White
SS-LS103V	10AX	3 gang	Vertical	SS/White
SS-LS104V	10AX	4 gang	Vertical	SS/White
SS-LS105V	10AX	5 gang	Vertical	SS/White
SS-LS106V	10AX	6 gang	Vertical	SS/White
SS-LS101VB	10AX	1 gang	Vertical	SS/Black
SS-LS102VB	10AX	2 gang	Vertical	SS/Black
SS-LS103VB	10AX	3 gang	Vertical	SS/Black
SS-LS104VB	10AX	4 gang	Vertical	SS/Black
SS-LS105VB	10AX	5 gang	Vertical	SS/Black
SS-LS106VB	10AX	6 gang	Vertical	SS/Black

Grid and Plates			
Product Code	No. Of Gangs	Configuration	Colour
SS-PB1	1 gang	Vertical	SS/White
SS-PB2	2 gang	Vertical	SS/White
SS-PB3	3 gang	Vertical	SS/White
SS-PB4	4 gang	Vertical	SS/White
SS-PB5	5 gang	Vertical	SS/White
SS-PB6	6 gang	Vertical	SS/White
SS-PB1B	1 gang	Vertical	SS/Black
SS-PB2B	2 gang	Vertical	SS/Black
SS-PB3B	3 gang	Vertical	SS/Black
SS-PB4B	4 gang	Vertical	SS/Black
SS-PB5B	5 gang	Vertical	SS/Black
SS-PB6B	6 gang	Vertical	SS/Black

Description

The PLATINUM Series range of switches and socket outlets are the architects' choice at only 1mm thick. Manufactured from brushed stainless steel 316 material, ensuring it will not corrode in demanding applications. Mechanisms are rated at 240V AC 10AX, switch contacts are made from a silver nickel coating to prevent arcing and terminal screws are made from solid brass. All PLATINUM Series products come with a 10 Year InHouse Warranty. Available in stainless steel with either white or black, from 1 to 6 gang. 84mm screw centre mountings.

Features

- 1.2mm Thick
- Available in White and Black
- 316 Stainless Steel Brushed Grain
- Silver Nickel Composition Switch Contacts



Approvals

Energy Safe Victoria

Technical Parameters

- Rated Voltage: 240V ac
- Rated Frequency 50Hz / 60Hz
- Complies with AS/NZ3112, 3133
- Cut out 96mm x 67mm (See template)


Socket Outlets			
Product Code	Rating (Amps)	Configuration	Colour
SS-POS10	10AX	Single GPO	SS/White
SS-POD10	10AX	Double GPO	SS/White
SS-POD10X	10AX	Double GPO + extra switch	SS/White
SS-POS10B	10AX	Single GPO	SS/Black
SS-POD10B	10AX	Double GPO	SS/Black
SS-POD10XB	10AX	Double GPO + extra switch	SS/Black

Warranty

The PLATINUM Series of product come with a 10 Year InHouse Warranty. That means that you have peace of mind knowing that if a fault develops within a five year period, Connected Group Australia will cover the cost of replacing the product and it's installation.*

*See our website for full terms and conditions www.connectedswitchgear.com.au

Related Products

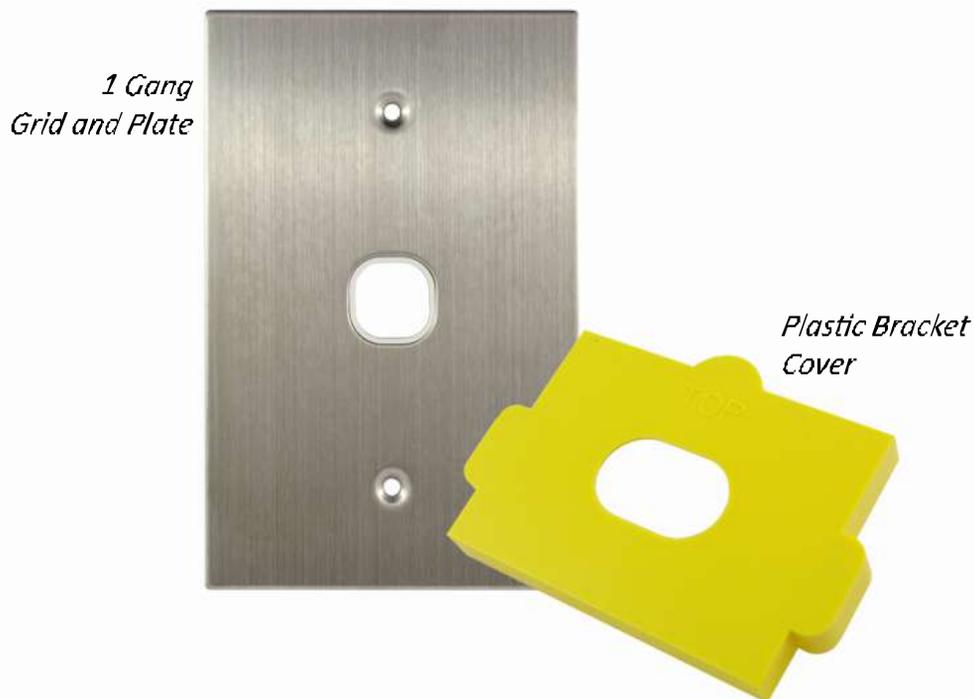


*All products are available in stainless steel with white
or black inserts.
Plastic bracket cover is also available.*

Description

Removable plastic cover for plaster bracket render fix to suit the PLATINUM Series.

Features

- 10mm Thick
- Yellow Only

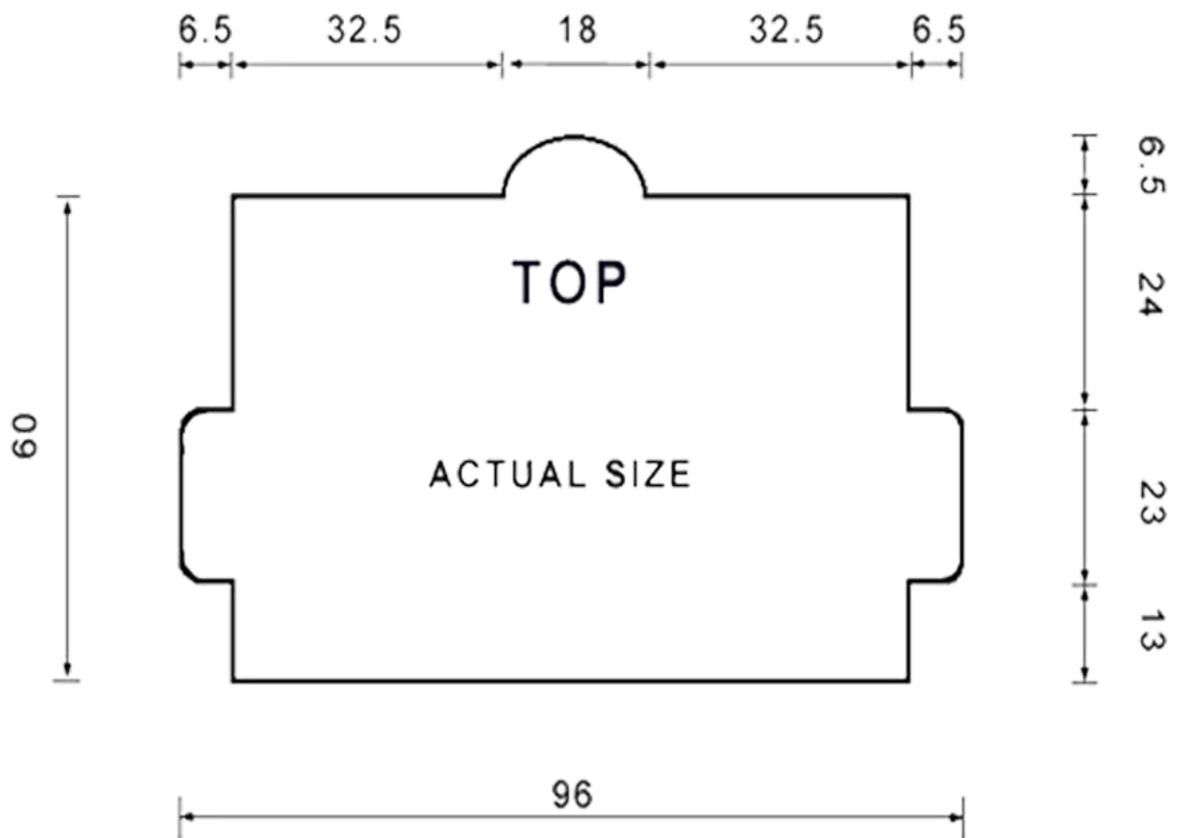

Switches & Socket Outlets Series Comparison

					
Category	Standard	Standard	Slimline	Slimline	Metal Plate
Warranty	6 mth replace	5 yr in house	5 yr in house	5 yr in house	10 yr in house
Internal Metal Components	Polycarbonate /Nylon	Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel /Polycarbonate
Terminal Screws	Brass	Brass	Brass	Brass	Brass
Switch Contacts	Silver	Silver/Nickel	Silver	Silver	Silver
Voltage Rating	240V ac	240V ac	240V ac	240V ac	240V ac
Wall Switch Dimensions	74x116x13	77x115x13	77x115x6.5	77x115x6.5	86x131x1.2
GPO Dimensions	74x116x16	77x115x13	77x115x6.5	77x115x6.5	86x131x1.2
Wall Switch Mechanism Rating	16A	16AX	10AX	10AX	10AX
Vertical GPO	✘	✘	✓	✓	✘
4 Gang GPO	✘	✘	✓	✓	✘
Wall Switches	1-6 gang	1-6 gang	1-6 gang	1-6 gang	1-6 gang
Removable Extra Switch on GPO	✓	✓	✓	✓	✓
GPO Configuration	Horizontal	Horizontal	Horizontal/Vertical	Horizontal/Vertical	Horizontal
15A GPO	Single Only	Single/Double	Single/Double	Single/Double	✘
20A GPO	✘	✓	✘	✘	✘
Quick Fit GPO	✘	✓	✘	✘	✘
Architrave Switches	1-2 gang	1-2 gang	1-4 gang	1-2 gang	✘
Colours	White	White/Black	White/Black	White/Black	White/Black
Mounting Block Colours	White	White/Black	✘	White/Black	✘
Mounting Block Size	14/30	14/30	✘	10/14/18/30/35	✘
Cover Plates	Aluminium	Stainless Steel	Aluminium/Brass	Aluminium/Brass	✘
Architrave Cover Plates	✘	✘	✘	1-4 gang	✘
Paint Covers	✓	✓	✓	✓	✘
Single USB Compatible	✓	✓	Grid Plates Only	Grid Plates Only	Grid Plates Only
Dual USB Compatible	✓	✓	✓	✓	✓
Interchangeable with Clipsal Mechanisms	✓	✓	✓	✓	✓

NOTE: All measurements are in millimetres.