


# Accord Wall Light Installation Instructions



## Product Specifications

Model No.	HV3630T-BLK	HV3630T-WHT	HV3631T-BLK	HV3631T-WHT	HV3632T-BLK	HV3632T-WHT
Name	Accord					
Material	Aluminium					
Colour	Black	White	Black	White	Black	White
IP Rating	IP54					
Protection Class	1 (240v Requires Earth)					
Input Voltage	240v AC					
Lamp Base	GU10					
Lamp Wattage	1x 5w		1x 5w		2x 5w	
Colour Temp	TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k	
Lumens	250lm, 275lm, 300lm		250lm, 275lm, 300lm		2x 250lm, 2x 275lm, 2x 300lm	
CRI	> 80					
Wiring	Parallel					
Dimmable	No					
Warranty	3 Years Replacement*					

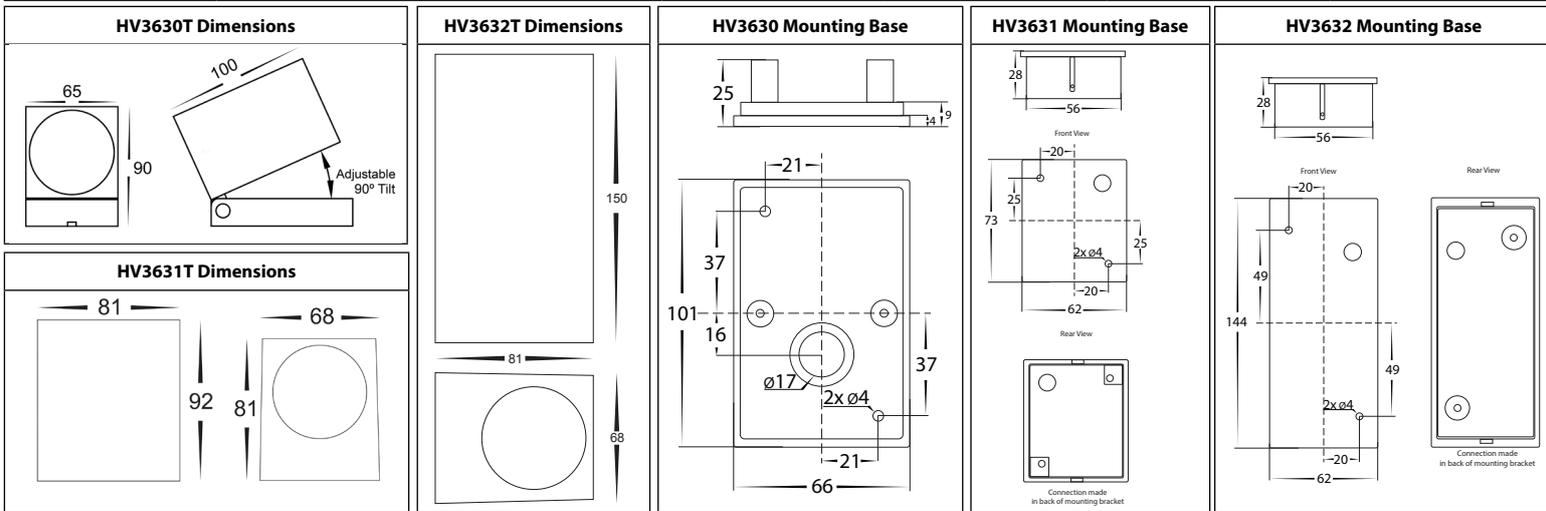

### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 3045S fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

### Steps for Installation for HV3630:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove the screws from front of fitting and set aside
3. Remove base plate from fitting
4. Connect the cable using wire with earth. Connect earth first, then live and neutral wires.
5. Attach base plate in desired location making sure to seal all holes including cable entry and around screws.
6. Reattach fitting to baseplate
7. Fitting is preset to 3000k, to change remove cover from fitting by removing 4x screws at back of head.
8. Slide head off fitting and remove globe, Slide switch on side of globe to desired colour temperature.
9. Reattach cover to fitting making sure screws are tight to avoid water penetration
10. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
11. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

### Steps for Installation for HV3631 + HV3632:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove the screws from top and bottom of fitting and set aside
3. Remove base plate from fitting
4. Locate IP rated junction box within fitting. Undo screws from junction box and remove cover.
5. Insert cable through cable gland on junction box. If your cable is not circular you must fix entry of your cable to maintain IP rating. Failure to do so will void warranty.
6. Connect the cable using wire with earth. Connect earth first, then live and neutral wires.
7. Reattach cover to IP rated junction box making sure screws are tight and seals are still in place.
8. Attach base plate in desired location
9. Fitting is preset to 3000k, to change remove globes and slide switched on side to desired colour temperature
10. Reattach fitting to baseplate making sure screws are tight to avoid water penetration.
11. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
12. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

### Steps for Changing Globe:

1. Remove cover from fitting by removing screws from top and bottom of fitting.
2. Slide head off base plate.
3. Insert new globe making sure to check correct globe is used - Refer product label for correct wattage
4. Reattach fitting to base plate making sure screws are tight to avoid water penetration

**Must be installed by a licensed electrician**

### Contact Details:

143 Beauchamp Road  
 Matraville NSW 2036  
 Australia  
 Tel: 02 9381 8300  
 Fax: 02 9666 8881  
 Email: sales@havit.com.au  
 Web: www.havit.com.au

### Warranty Terms & Conditions\*



### Additional Information

