


PRODUCT SPECIFICATIONS

- Material:** Plastic
- Colour:** White
- No. of Channels:** 1
- Input Voltage:** 240v
- Output Signal:** 2.4Ghz
- Output Power:** 400w (LED 200w)
- Transmitting Range:** Up to 30m
- IP Rating:** IP20
- Dimmable:** Yes (0.1% - 100%)
- Warranty:** 2 Years Replacement**



DIMENSIONS

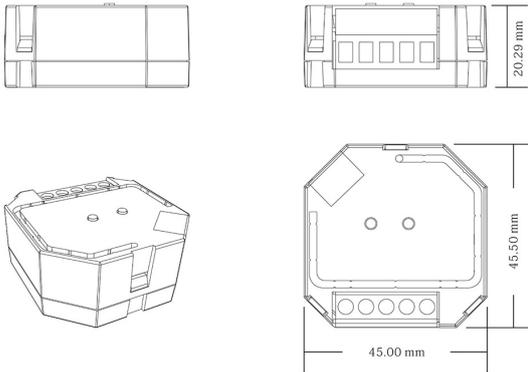

COMPATIBLE WITH




- HV9101-ZB-5C
- HV9101-ZB-SCTP
- HV9102-ZB-SCREM

IP RATING



OPERATING INSTRUCTIONS

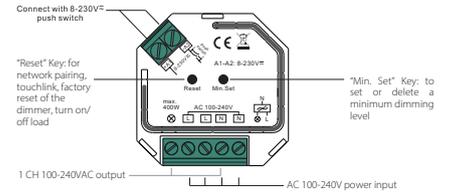

Product Data			
Input Voltage	Output Voltage	Output Current	Size(LxWxH)
100-240VAC	100-240VAC	1.5A max	45.5x45x20.3mm

Compatible Load Types			
Load Symbol	Load Type	Maximum Load	Remarks
	Dimmable LED lamps	200W @ 220V 100W @ 110V	Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power factor result when connected to dimmer.
	Dimmable LED drivers	200W @ 220V 100W @ 110V	Maximum permitted number of drivers is 200W divided by driver nameplate power rating.
	Incandescent lighting, HV Halogen lamps	400W @ 220V 200W @ 110V	
	Low voltage halogen lighting with electronic transformers	200W @ 220V 100W @ 110V	

Product Ordering

IMAGE


PART NUMBER



HV9105-ZB-ACDIM

SAMPLE INSTALLATION DIAGRAM

TouchLink to a Zigbee Remote

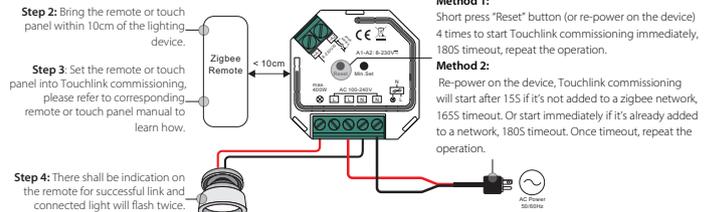

- Note: 1) Directly TouchLink (both not added to a ZigBee network), each device can link with 1 remote.
 2) TouchLink after both added to a ZigBee network, each device can link with max. 30 remotes.
 3) For Hue Bridge & Amazon Echo Plus, add remote and device to network first then TouchLink.
 4) After TouchLink, the device can be controlled by the linked remotes.

** See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS:
 143 Beauchamp Road
 Matraville NSW 2036
 Australia

Tel: 02 9381 8300
 Fax: 02 9666 8881
 Email: sales@havit.com.au
 web: www.havit.com.au