


Nella Pendant Installation Instructions




Product Specifications

Model No.	HV5802T-BLK-P	HV5802T-WHT-P	HV5803T-BLK-P	HV5803T-WHT-P	HV5805T-BLK-P	HV5805T-WHT-P
Name	Nella					
Material	Aluminium					
Colour	Black	White	Black	White	Black	White
Cable Length	1500mm - Adjustable					
IP Rating	IP20					
Input Voltage	240v					
Protection Class	1 (Requires Earth) 					
Lamp Base	Built in LED					
Lamp Wattage	1x 7w		1x 12w		1x 18w	
Colour Temp	TRI-Colour - 3000k, 4000k, 5500k		TRI-Colour - 3000k, 4000k, 5500k		TRI-Colour - 3000k, 4000k, 5500k	
Lumens	525lm, 560lm, 540lm		995lm, 1125lm, 1050lm		1380lm, 1430lm, 1305lm	
CRI	> 80					
Wiring	Parallel					
Dimmable	Yes - Triac Dimmable					
Warranty	3 Years Replacement*					


HV5802 Dimensions

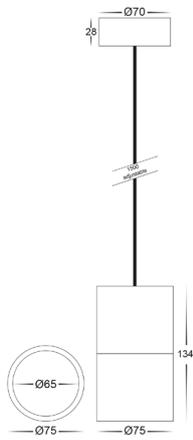

HV5803 Dimensions

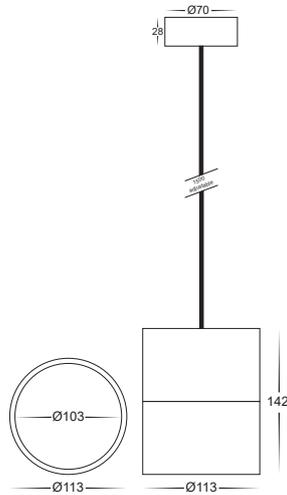

HV5805 Dimensions

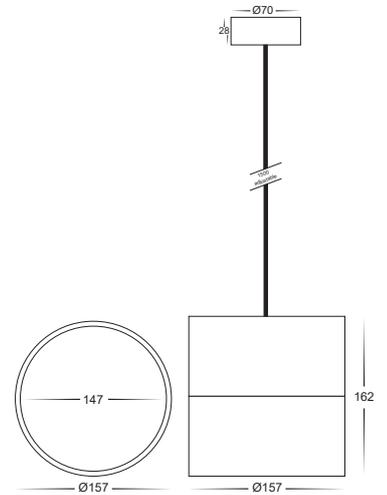

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove bracket from canopy by removing screws on side and set aside .
3. Install bracket in desired location using appropriate screws for application.
4. Adjust cable to desired length and remove excess.
5. Connect the cable: Use wire with earth, connect earth first then positive and then neutral
6. Once desired length is achieved reattach fitting to bracket making sure screws are tight.
7. Fitting is preset to 3000k, To change slide switch on top of fitting to desired colour temperature
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

