



STINGER

Double
Floodlight

22287/ _ _

/05-White

/06- Black

Before first using your new Brilliant Floodlight, it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product. Find a place and keep this document handy for future reference.

THIS FITTING MUST BE INSTALLED BY A QUALIFIED ELECTRICAL CONTRACTOR in accordance with the latest AS/NZS 3000 and relevant amendments

FOR YOUR SAFETY

- To prevent electrical shock, please ensure that POWER is DISCONNECTED before installation.
- During use the light head and/or light assembly may become hot.
- Do not install in a position where the fitting can be easily accessed by children or the infirm.
- Do not touch any parts of the assembly with bare hands while it is 'ON'.
- Be aware of the height of your installation. Refer to 'Working at Heights' guide from your local or State Authorities.
- Any alterations or additions to building wiring **must be completed by a licensed electrician** or person authorised by legislation to work on the fixed wiring of any electrical installation.

22287/05 - White



22287/06- Black




Specifications:

Product Code:	22287/05- White ; 22287/06 - Black
Description:	STINGER LED double floodlight
Voltage Wattage:	220-240V AC , 50Hz, 2 x 10 W , total 20W
IP rating:	IP44
Lumens:	1700lm max, Cool White
CRI:	>80
Beam Angle:	120°
Rated Life Span:	35000h
Material:	Polycarbonate
Weight:	0.53kg
Class:	Class II

Installation Instructions


Before first using your new Brilliant LED floodlight, it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product

THIS FITTING MUST BE INSTALLED BY A QUALIFIED ELECTRICAL CONTRACTOR in accordance with the latest AS/NZS 3000 and relevant amendments

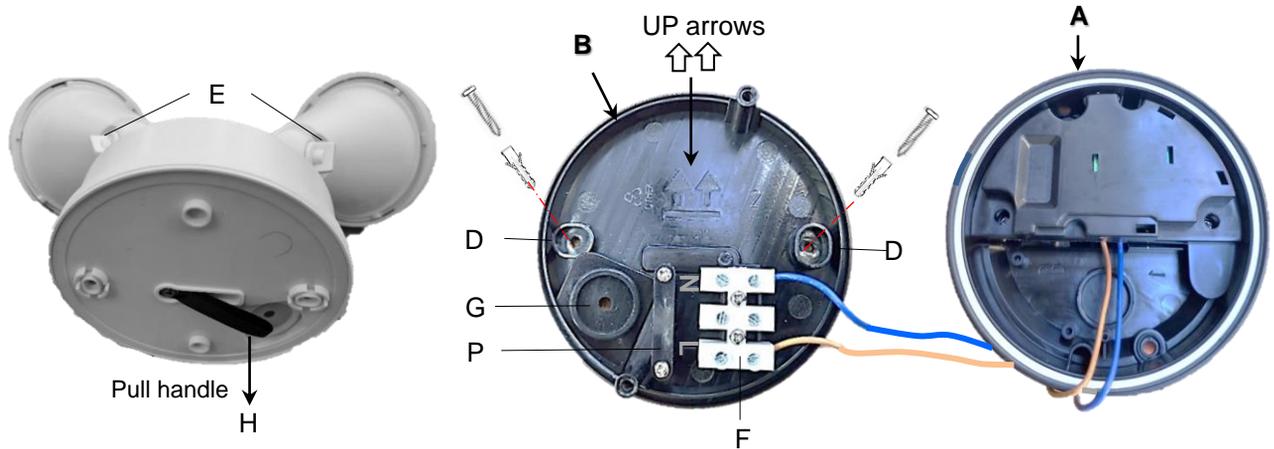


Installation:

1. Switch the mains power OFF.
2. Remove the mounting base 'B' from the light body 'A' by unscrewing the two front screws 'C'. Pull handle 'H' to remove mounting plate 'B'.
3. Drill two holes in the wall using the holes 'D' in the mounting base 'B' as a template. Ensure mounting base will face UP in correct orientation, refer to UP arrows on it.
4. Insert the plastic rawl plugs into the holes if required.
5. Before installing the mounting base back onto the wall, run your mains cable through grommet 'G', then secure the mounting plate by tightening the screws into the rawl plugs. **WARNING:** Ensure the mounting base 'B' is facing in correct orientation, refer to the 'UP' arrow on it.
6. Connect the wiring into the Terminal Block 'F' ensuring power cable passes through rubber grommet 'G'. Secure the cable with cable clamp 'P'. Apply silicone around cable and grommet 'G' if required to maintain IP rating.
7. Connect the Neutral (N) and Active (L) according to the markings on the terminal block 'F'. (Middle terminal is a spare one)
8. Refit the light body 'A' to the mounting base 'B', securing it in place using 2 screws 'C' and washers removed earlier. Tighten the screws firmly.
9. Adjust the head(s) 'H' into desired direction by loosening up the butterfly nut 'E' in the knuckle. Re-tighten nut 'E' after adjustment.
10. Switch ON the power.

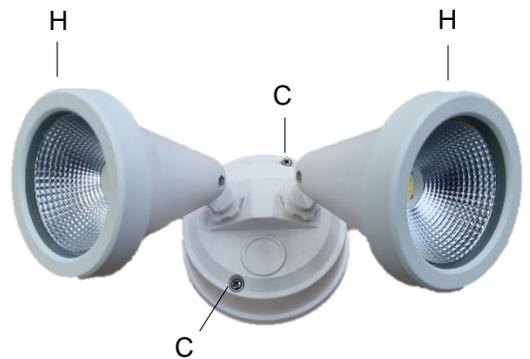

Terminal block

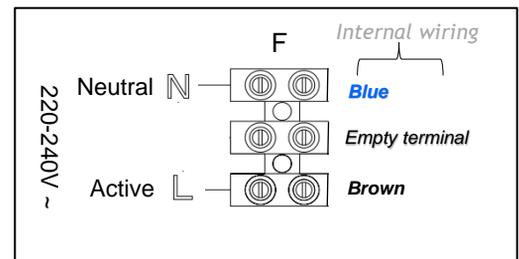



STINGER

Double
Floodlight

22287/_ _

/05-White

/06- Black

WARNINGS

- All products must be installed by a licensed electrician. All wiring must conform to AS/NZ3000 and relevant Amendments.
- Disconnect all power before installing this product.
- Ensure fitting is installed in correct orientation. Refer to the UP arrows from inside of the mounting plate. If installed incorrectly the warranty will get void.
- Do not attempt to adjust the angle of the fixture until the unit has been switched off.
- Loosen all knuckles and screws on lights (and sensor if applicable) before adjusting. Failure to do so can damage the fitting.
- This product is double insulated (Class II construction).
- Ensure all electrical connections are firm.
- Ensure the butterfly nut 'E' in each knuckle is well tightened to maintain IP rating and prevent water ingress.
- Care should be taken when drilling into wall so as not to drill into hidden power cabling.
- Designed for wall installation, not recommended for ceiling installation.
- DO NOT ATTEMPT TO OPEN THE LIGHT FIXTURE – The fitting has no serviceable parts.
- The unit is not dimmable.
- Do not allow children to play with the product.
- Do not use excessive force adjusting the heads into desired direction.
- Do not perform modification or change parts within the light fixture.
- Never operate the fixture without the glass lens installed.
- Suitable for outdoor use.

Recycling and environmental concerns

- Dispose of packaging thoughtfully
- When the fitting reaches it's end life, recycle in accordance with your local regulations

- This fitting has no serviceable parts.



STINGER

Double
Floodlight

22287/ _ _

/05-White

/06- Black

Warranty:

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 3 years from date of purchase. This warranty is only valid for products installed by a qualified electrical contractor and operated within the guidelines specified by Brilliant Lighting, and within the correct operating voltage ranges as stated on the product's rating label.

Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, incorrect installation, service by unqualified or unauthorised personnel or lack of regular maintenance and cleaning. Proof of installation by qualified personnel may be required, eg. Electrical Safety Certificate. Proof of purchase must be supplied with all warranty claims.

This warranty is provided in addition to any other rights and remedies of the customer under any law. Liability is limited to replacement or reimbursement of product only.

Our goods come with guarantees that can not be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 3 years of the date of purchase of the product. To make a claim under the warranty, take the product (with proof of purchase – receipt or similar) to the store where you purchased the product or contact Brilliant Lighting at the address below, or use our warranty claim form found on our website.

This warranty is given by:

Brilliant Lighting (Aust)Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555
Email: warranty@brilliantlighting.com.au

Made in China