# **PowerShield Unmanaged Power Distribution Units (PDUs)**

IEC Horizontal Combined MBS+PDUs (2kVA, 3kVA) | MBS & Optional PDU (10kVA)



## **MBS + Hot Swap PDU**


For PowerShield UPSs 0-3kVA

### **Features:**

- No downtime. Routine maintenance can be performed at any hour
- A PDU (Power Distribution Unit) with 7 outlets for distribution to your load
- Rackmount MBS can be mounted both horizontally or vertically (ORU) into a rack
- Wallmount option, vertically or horizontally
- UPS Mountable. Designed to attach to PowerShield Centurion RT and Commander RT ranges.
- Suitable for all UPS topologies including offline, line interactive and true online double conversion



MBS for Power Shield UPS 0-3KVA				
Model Number	PSMBS2K	PSMBS3K		
UPS Rating	0-2KVA	3KVA		
Input connector - plug	10A IEC 320 C14	16A IEC 320 C20		
Input lead (x1)	10Amp Australian Plug to IEC 320 C13	15Amp Australian Plug to IEC 320 C19		
Output - sockets (Load)	10A IEC 320 C13 (x7)	10A IEC 320 C13 (x6) 16A IEC 320 C19 (x1)		
UPS Input/Output leads	IEC 10A cable (x2)	IEC 16A cable (x2)		
Dimensions D x W x H (mm)	80 x 440 x 50	80 x 440 x 50		

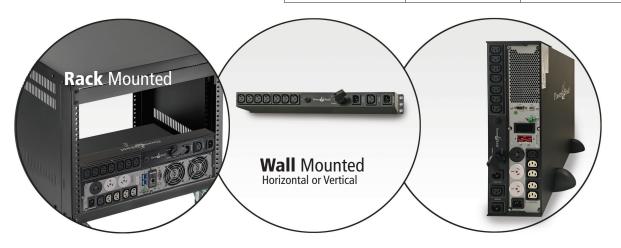

## **Rack Mount MBS & Optional PDU**

For PowerShield UPSs 6-10kVA

Three modes of operation: UPS, Bypass and Bypass & Isolate

#### PSPDU10K (Optional PDU)

#### **Features:**

Mechanical safety microswitch with static bypass activation is standard.
This eliminates the possibility of incorrect switching sequences and hence possible damage to the UPS and injury to personnel

Optional PDU available to connect 10A/15A devices through IEC distribution outlet sockets

MBS for Power Shield UPS 6-10KVA		(optional PDU)	(optional PDU)
Model Number	PSMBSR10K	PSPDU6K	PSPDU10K
UPS Rating	6–10KVA	6KVA	10KVA
Input (Nominal)	240Vac		
Input plug	Hard Wire		
Output (Nominal)	240Vac		
Output sockets	Hard Wire	10A IEC 320 C13 (x8), 16A IEC 320 C19 (x2)	10A IEC 320 C13 (x8), 16A IEC 320 C19 (x4)
Style	Rackmount		
Dimensions (D x W x H) mm	254x433x88mm	70x433x44mm	70x433x88mm



