

Anova Ceiling Fan (Wi-Fi)

FC1140BKWIFI/FC1140WHWIFI/FC1148BKWIFI/FC1148WHWIFI



This product must be installed by a licensed electrician

Features

- Wi-Fi (No hub required)
- Energy efficient DC motor with 6 speed settings & breeze mode
- Control via physical remote (supplied) or via the app
 - Turn fan on/off & adjust speed
 - Turn light on/off, dim & adjust colour temperature (3000k to 6500k) LED light model only
 - Set off timer for fan (either 1, 4 or 8 hours)
 - Reverse direction (for summer & winter use)
- Customizable timers & schedules for fan and/or light via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



FC1140BKWIFI

FC1148WHWIFI



Network/Device Requirements

retirony befree Requirements		
Connectivity	Wi-Fi	
Requirements	Existing 2.4GHz Wi-Fi network	
Protocol	IEEE 802.11 b/g/n	
Wireless Frequency	2.4GHz	
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)	

Included Accessories

Remote control, 2 x AAA batteries, Wall bracket (for remote), Mounting screws

Additional accessories available, please see page 2 for listing and part numbers

Technical Specifications

	FC1140BKWIFI/FC1140WHWIFI (no light)	FC1148BKWIFI/FC1148WHWIFI (LED light)	
Supply Voltage	220 -240V	a.c. 50Hz	
Standby Wattage	<2W		
Rated Power (Total)	35W	55W	
(Fan)	35W		
(Light)	-	20W	
Fan Speed (RPM)	87(min) – 194(max)		
Max Airflow (1)	10,552m³/h		
Location Suitability	Indoor or enclosed outdoor		
Terminal Size	2.5mm ²		
Colour	White/Black		
Housing Material	ABS		
Blade Material	ABS		
Weight	6.4kg	6.7kg	
Dimensions (Total)	281mm x 1320mm (H x Diam)	370mm x 1320mm (H x Diam)	
(Blade)	587mm x 139mm (L x W)	587mm x 139mm (L x W)	
(Downrod)	152mm x 21mm (H x Diam)		
Lumens (2)	-	1200lm	
Colour Range (CCT)	-	Adjustable, 3000K to 6500K	
CRI	-	>80	
Dimmable	-	Yes ⁽³⁾	
Batteries (Remote)	2 x AAA		
Frequency (Remote)	433.9MHz		
Compliance /	AS/NZS 4268, AS/NZS 60335.1, AS/NZS 60335.2.80, AS/NZS 60598.1, AS/NZS 60598.2.1,		
Standards	CISPR 14, CISPR 15		

⁽¹⁾ Accredited testing to U.S D.O.E airflow standards. Actual performance may vary.

⁽³⁾ This luminaire is dimmable the via app or included remote only and must not be used in conjunction with other dimmers











⁽²⁾ Average measured lumen value.




Anova Ceiling Fan (Wi-Fi)


FC1140BKWIFI/FC1140WHWIFI/FC1148BKWIFI/FC1148WHWIFI



This product must be installed by a licensed electrician

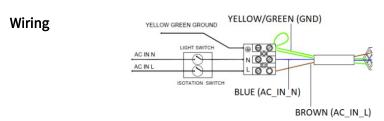

Dimensions

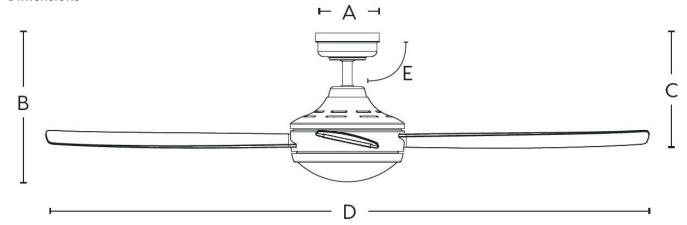


	FC1140BKWIFI/FC1140WHWIFI (no light)	FC1148BKWIFI/FC1148WHWIFI (LED light)	
A (upper canopy)	140mm		
B (total height)	335mm	370mm	
C (ceiling to lower blade edge)	282mm		
D (blade span)	1320mm		
E (raked pitch)	15° (max)		

Installations Notes / Considerations

Fans shown are for illustration purposes only. Actual product may vary.

- At least 2.1m from lowest point of blades to floor surface.
- At least 1.0m from blade tip to nearest walls.
- At least 1.5m from blade tip to door, window, neighbouring fan or air conditioning outlet.



Spare Parts & Accessories

For full list of replacement parts, please see instruction manual or contact customer service

	FC1140BKWIFI/FC1140WHWIFI (no light)	FC1148BKWIFI/FC1148WHWIFI (LED light)	
Downrod – 600mm	FD360600WH		
Լ Wiring loom	XFC8283		
Downrod – 900mm	FD360900WH		
Լ Wiring loom	XFC8284		
Remote (handset only)	FRM124		
Remote & receive kit	FRMW1140	FRMW1148	
Replacement blades	FL770134WH/FL770134BK	FL770134WH/FL770134BK	
Diffuser	N/A	FG777134	
LED panel	N/A	XFC1148	



This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit https://www.mercator.com.au/product-support/warranty for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercator.com.au







