

Corcovado Pendant

Classic designed pendant luminaire to suit a variety of design applications.



Specification

- Corcovado is available in 4 size, mini, small, medium and large
- Die cast aluminium body
- Integral control gear
- Adjustable stainless steel double wire suspension mini - 2.0m long
medium/large - 2.6mtr long
- Small version 2.5mtr rod suspension only available
- The opal base is IP20 and the safety glass is set in the Silver reflector offering IP65



Quick Spec

Hoffmeister die cast aluminium, decorative indirect light glow, integral electronic control gear, adjustable double steel wire suspensions.

Design Application

Retail centres, arcades, foyers hotels bars and restaurants.


Product Codes

Code	Version	Dim (mm)	Mass (kg)
0.55119.73-906	HIE 70W Large / Silver Reflector	275 x 438	5.4
0.55119.75-906	HIE 150W Large / Silver Reflector	275 x 438	7.0
0.55150.31-906	TC-TEL 42W Large / Opal Base	275 x 438	4.8
0.55120.31-906	TC-TEL 42W Large / Silver Reflector	275 x 438	5.0
0.55217.44-906	TC-TEL 26W Medium / Silver Reflector	190 x 305	3.7
0.55218.44-906	TC-TEL 26W Medium / Opal Base	190 x 305	3.2
0.55227.42-906	TC-TEL 13W Small / Silver Reflector	139 x 218	1.1
0.55218.43-906	TC-TEL 18W Medium / Opal Base	190 x 305	3.2
0.55217.43-906	TC-TEL 18W Medium / Silver Reflector	190 x 305	3.7
0.55257.42-906	TC-TEL 13W Small / Opal Base	139 x 218	1.0


Performance

0.55117.44 - 1 x TC-T 26W

Polar intensity diagram



Beam diagram

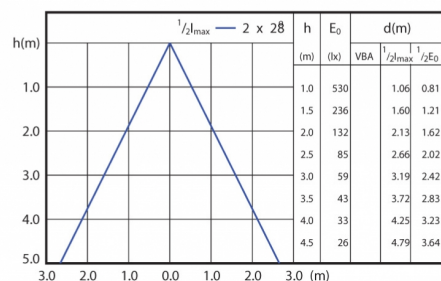

Light output ratio 0.34
Service upward 0.03
Service downward 0.31

I_{max} 530 cd

BS (1/2 I_{max}) 2 x 28°
BS (1/2 E₀) 2 x 22°

